
## www.cablematic.com

## OPERATION FOR DIGITAL TIMR

## SEE THE PICTURE AS FOLLOW

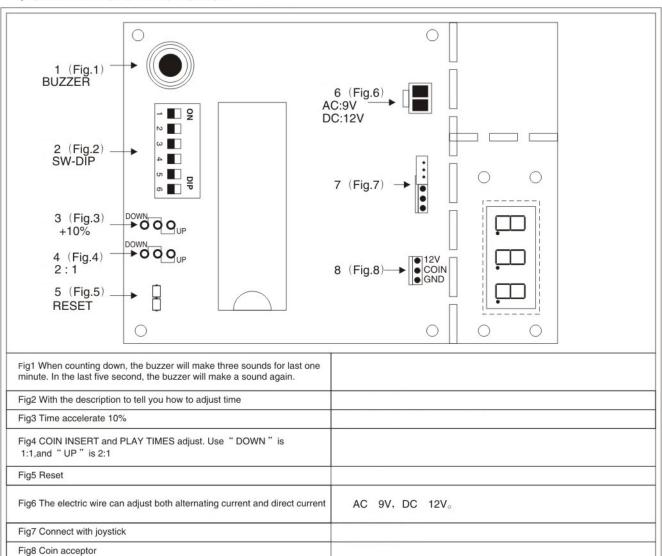

## 二、ADJUST TIME SW-DIP

SW-DIP							
1	2	3	4	5	6	TIME MIN	MULTPLE
				OFF	OFF		1
		).		ON	OFF		2
				OFF	ON		5
				ON	ON		10
OFF	OFF	OFF	OFF			1	
ON	OFF	OFF	OFF			2	
OFF	ON	OFF	OFF			3	
ON	ON	OFF	OFF			4	
OFF	OFF	ON	OFF			5	
ON	OFF	ON	OFF			6	
OFF	ON	ON	OFF			7	
ON	ON	ON	OFF			8	
OFF	OFF	OFF	ON			9	
ON	OFF	OFF	ON			10	
OFF	ON	OFF	ON			11	
ON	ON	OFF	ON			12	
OFF	OFF	ON	ON			13	
ON	OFF	ON	ON			14	
OFF	ON	ON	ON			15	
ON	ON	ON	ON			16	