




60x60 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with dimmable driver.


Complies with standard EN60598-1 and any other specific standards.

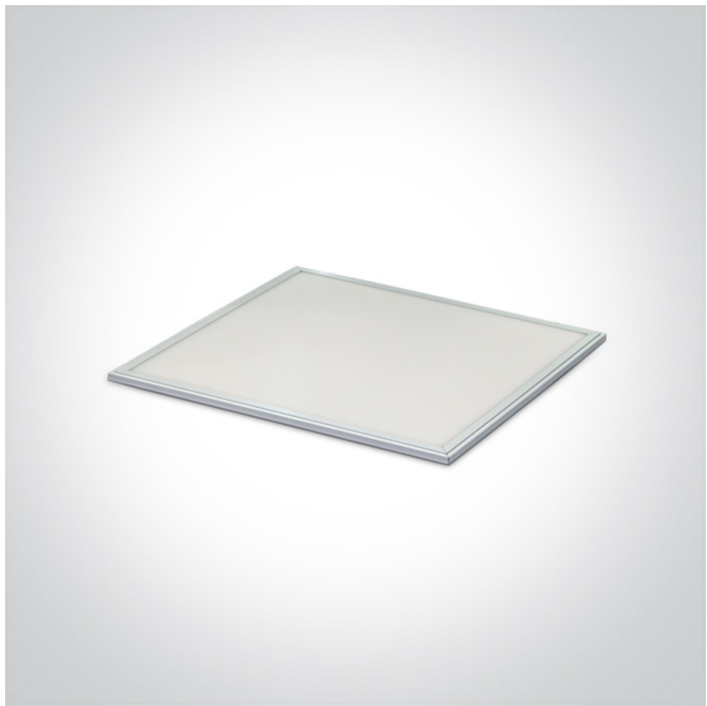

Downloads



Dimensions



Gallery



Related items



89050L



89050TLD

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The 48W Square Panels Aluminium

Order Code	50148F/W/C
Colour	White
Material	Aluminium
Diffuser Material	Acrylic
Shape	Rectangular
Length	595mm
Width	595mm
Height	20mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1200mA

Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand



48W

IP20

LED built in

SMD 2835

Epistar

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
1200mA
IP Rating
Safety Class
Dimmable
Housing Material
Brand

Led Driver

220-240V

Yes

Yes

32,4-50,4W

0.9

Yes

27-42V

IP20



Yes

Plastic

Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K

3800lm

79,167lm/W

70


120°



Packing Info

Pcs/Carton	2
Barcode	5291889034889
HS Code	9405109890

Energy Label

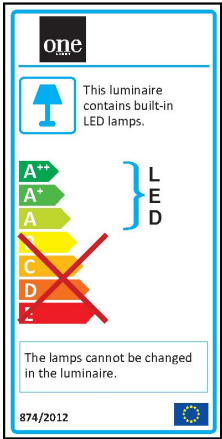

Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes