



48W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Requires 1200mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

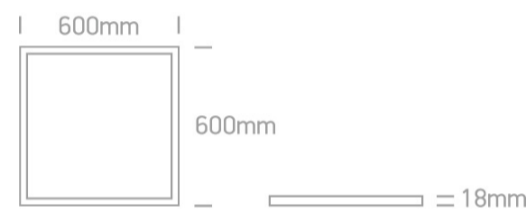

Gallery



Must be ordered separately



89048

Related items



89048T



89050L



89050TLD

Physical Specification

| | |
|--------------------|--|
| Item Group | 06 Downlights Fixed LED |
| Family | The 48W Square Recessed Panel Die cast |
| Order Code | 50148PE/W/W |
| Colour | White |
| Material | Die Cast |
| Diffuser Material | Acrylic |
| Shape | Rectangular |
| Length | 600mm |
| Width | 600mm |
| Height | 18mm |
| Cutout Hole Width | 585mm |
| Cutout Hole Length | 585mm |
| Recessed Ceiling | Yes |
| Depth Required | 80mm |
| Indoor | Yes |
| Adjustable | No |

Electrical Characteristics

| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 1200mA |
| Safety Class | III |
| Power(Watts) | 48W |

| |
|--------------|
| IP Rating |
| Light Source |
| LED Type |
| LED Brand |
| LED Number |

| |
|--------------|
| IP20 |
| LED built in |
| SMD 2835 |
| Epistar |
| 240 |

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Beam Angle |
| Illumination Diagram |

| |
|---|
| 3000K |
| 3900lm |
| 81,25lm/W |
| 80 |
| 120° |
|  |

Packing Info

| |
|------------|
| Box Length |
| Box Width |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode |
| HS Code |

| |
|---------------|
| 72cm |
| 65cm |
| 4,5cm |
| 4,05Kg |
| 4 |
| 5291889041924 |
| 9405109890 |

Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes
