



Datasheet

RS PRO 20cm DVI-D Male to 2x Female Splitter Cable


Stock number: 236-9110

EN

DVI-D splitter cable is for splitting one DVI-D and duplicating it to two DVI-D outputs. While the outputs use two DVI-I female connectors it only carries the DVI-D signal from the source. This product will split your video signal to deliver two identical images of the same resolution.

For best results it is recommended you use 5m cables or less and two identical displays.

Manufactured on UL cable UL Style Number 20276

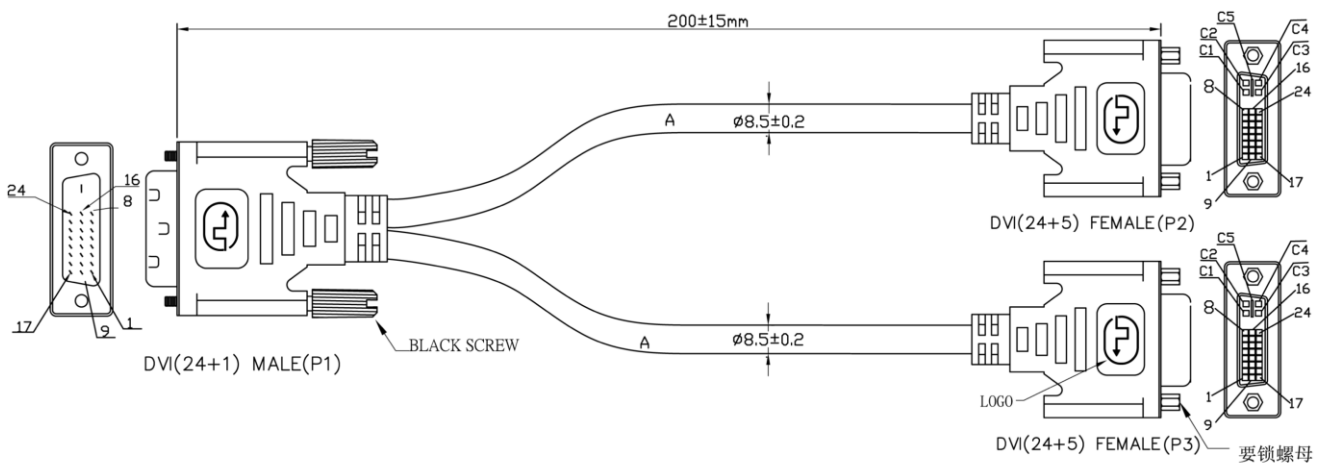

NOTE:

1. CABLE:(A)28AWG,UL20276,[(28AWG*1P+D)*7PCS]+28AWG*3C+28AWG*1P,AL+D+B,BLACK COLOR,DD=8.5mm,PVC JACKET.
2. LENGTH:0.2M
3. CONNECTORS:DVI(24+1) MALE*1PCS(BLACK INSULATION),DVI(24+5) FEMALE*2PCS(BLACK INSULATION).
4. MOLD:ASS'Y TYPE.
5. SCREW:#4*40 INCH SCREW *2PCS/INCH NUTS*4PCS.
6. CONTACTS:

P1	1	2	3	3	4	5	6	7	9	10	11	11	12	13	17	18	19	19	20	21	22	23	24	14	15	16	64
P2	1	2	3	3	4	5	6	7	9	10	11	11	12	13	17	18	19	19	20	21	22	23	24	14	15	16	64
	PAIR		G	G	PAIR		PAIR		PAIR		G	G	PAIR		PAIR		G	G	PAIR		G	PAIR		14	15	16	64
P1	1	2	3	3	4	5	6	7	9	10	11	11	12	13	17	18	19	19	20	21	22	23	24	14	15	16	64
P3	1	2	3	3	4	5	6	7	9	10	11	11	12	13	17	18	19	19	20	21	22	23	24	14	15	16	64
	PAIR		G	G	PAIR		PAIR		PAIR		G	G	PAIR		PAIR		G	G	PAIR		G	PAIR		14	15	16	64

RoHS / REACH / CE / UKCA

rspro.com