



25W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.

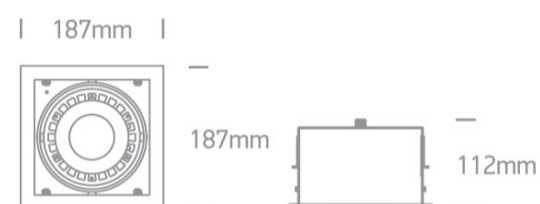
Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Gallery



## Physical Specification

Item Group

08 Downlights Adjustable LED

Family

The COB Shop Downlights Pro Die cast

Order Code

51125A/W/W

Colour

White

Material

Die Cast

Shape



Rectangular


Length

187mm

Width	187mm
Height	112mm
Cutout Hole Width	165mm
Cutout Hole Length	165mm
Recessed Ceiling	Yes
Depth Required	130mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	35V
Safety Class	
Power(Watts)	24,5W
IP Rating	IP20
Light Source	LED built in

LED Type
LED Brand

COB
Epistar

### Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
700mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Brand

Led Driver
100-240V
Yes
Yes
19,6-30,4W
0,9
Yes
28-43V
IP20

No
70°C
40°C
Plastic
Lifud

### Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
2300lm
92lm/W
80
40°

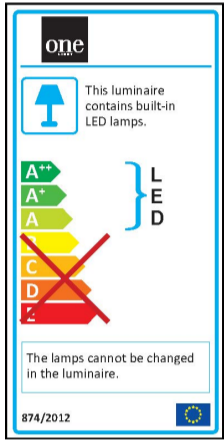

### Packing Info

Box Length
------------

20,5cm
--------

Box Width	19,5cm
Box Height	13,5cm
Box Weight	1,9kg
Pcs/Carton	8
Barcode	5291889039402
HS Code	9405409900

## Energy Label



## Certification & Warranty

Warranty	2 Years
Weee Directive	Yes