



45W SMD LED Recessed Adjustable downlight with wide beam angle, IP20.

Complete 1200mA driver.


Complies with standard EN60598-1 and any other specific standards




Downloads



Dimensions

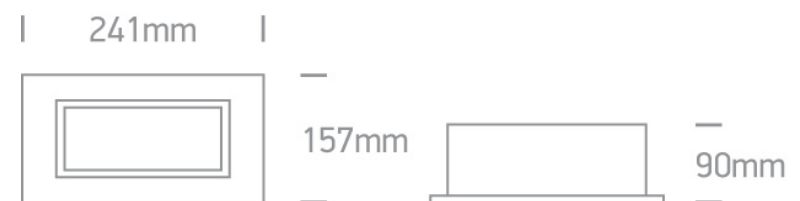

Gallery

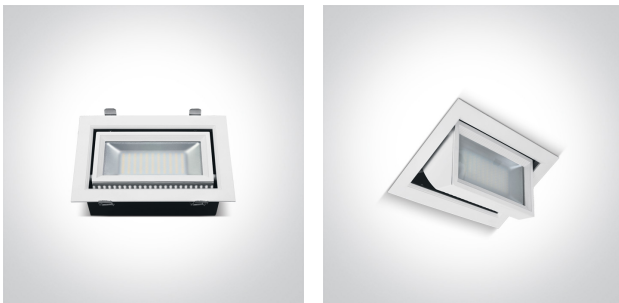

Physical Specification

Item Group

07 Downlights Adjustable LED

Family

The Box Type Shop Range

Order Code

51145/W/W

Colour

White

Material

Die Cast

Shape


Rectangular


Length



241mm

Width	157mm
Height	90mm
Cutout Hole Width	210mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes
Depth Required	150mm
Indoor	Yes
Adjustable	1 Direction


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	45W
IP Rating	IP20
Light Source	LED built in
Dimmable	No

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	34V
Safety Class	
Power(Watts)	41W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835

LED Brand	Sanan
LED Number	99
F Mark	
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	32,4-50,4W
Power Factor	0,9
Constant Current	Yes
1200mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise
Protection	0

Illumination Data

Colour Temperature	3000K
Lumen Output	3500lm
Light Efficiency	77,77lm/W
CRI	80
Beam Angle	95°
Illumination Diagram	

Packing Info

Box Weight

2,2Kg

Pcs/Carton

4

Barcode

5291889041184

HS Code

9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes