



2x20W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

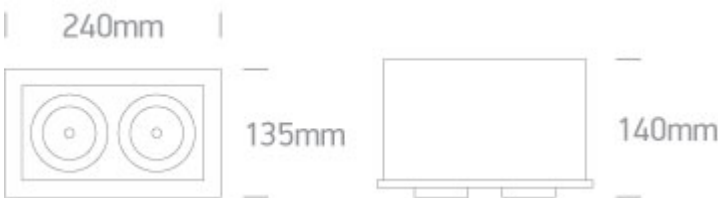

Gallery



Physical Specification		
Item Group	08 Downlights Adjustable LED	
Family	The COB Box Type Shop Range	
Order Code	51220B/W/C	
Colour	White	
Material	Die Cast	
Shape	Rectangular	
Length	240mm	

Width	135mm
Height	140mm
Cutout Hole Width	225mm
Cutout Hole Length	125mm
Recessed Ceiling	Yes
Depth Required	170mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	2x37,3V
Safety Class	
Power(Watts)	2x18,65W
IP Rating	IP20
Light Source	LED built in

LED Type
LED Brand

COB
Bridgelux

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
700mA
IP Rating
Safety Class
Dimmable
Housing Material
Brand

Led Driver
220-240V
Yes
Yes
18,9-29,4W
0,9
Yes
27-42V
IP20

No
Plastic
EAGLERISE

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

4000K
2x1600lm
80lm/W
80
36°


Packing Info


Box Weight
Pcs/Carton
Barcode

2kg
8
5291889044819

HS Code

9405409900

Energy Label

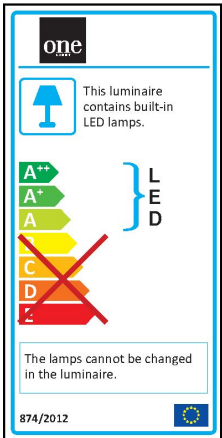

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes