


Shield wire connected to G with black

To connect the UFLASH Dual Controller to the “slave” keypad: you must use 22g, 5 conductor, shielded cable for proper operation. Cat-5 cable will not work properly, the cable must have a shield.

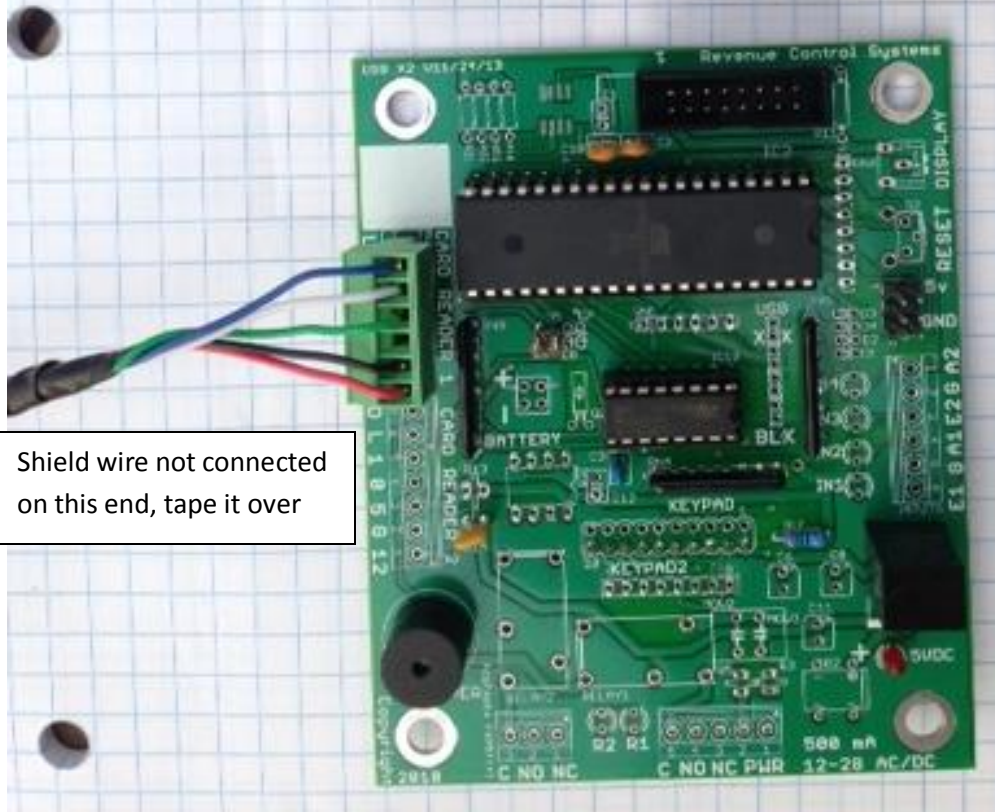

Shield wire not connected on this end, tape it over

On the UFLASH Controller, use the “Card Reader 2” connector. The Slave keypad will use the “card reader 1” connector . Wire the terminals straight through. L=Blue, 1=white, 0=green, (skip 5), G=black, 12=red. Connect the cable shield drain wire to the G terminal with the black wire only on the UFLASH Controller side, use only the black wire on the slave side. Tape off the end of the cable so that the shield does not touch anything.