





**FME-20-10KF**  
 FINEMET® NANOCRYSTALLINE Core Single Ended Output Transformer      Audio Feast

Wiring Connection

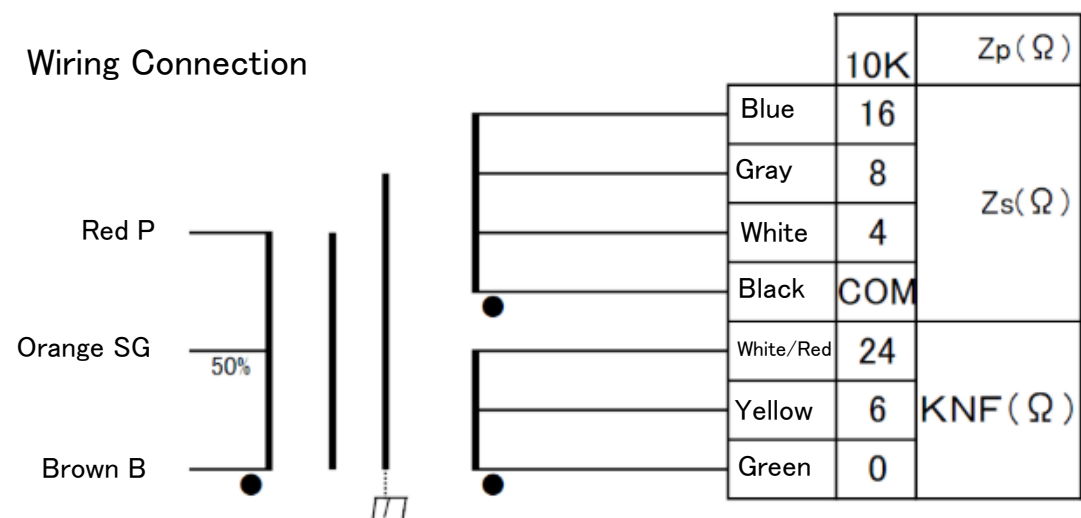


Output 20W (50Hz)  
 Freq. Response 20-40KHz (8 ohm, 1W, -3dB)  
 Pri. Inductance 32H (DC 60mA 50Hz)  
 Pri. DCR 377 ohm, Sec. DCR 0.55 ohm, Loss 0.44dB  
 Pri. max DC Current 110mA  
 Dimension 100x90x120(H)mm      Black hammered metal case, or Urushi finish

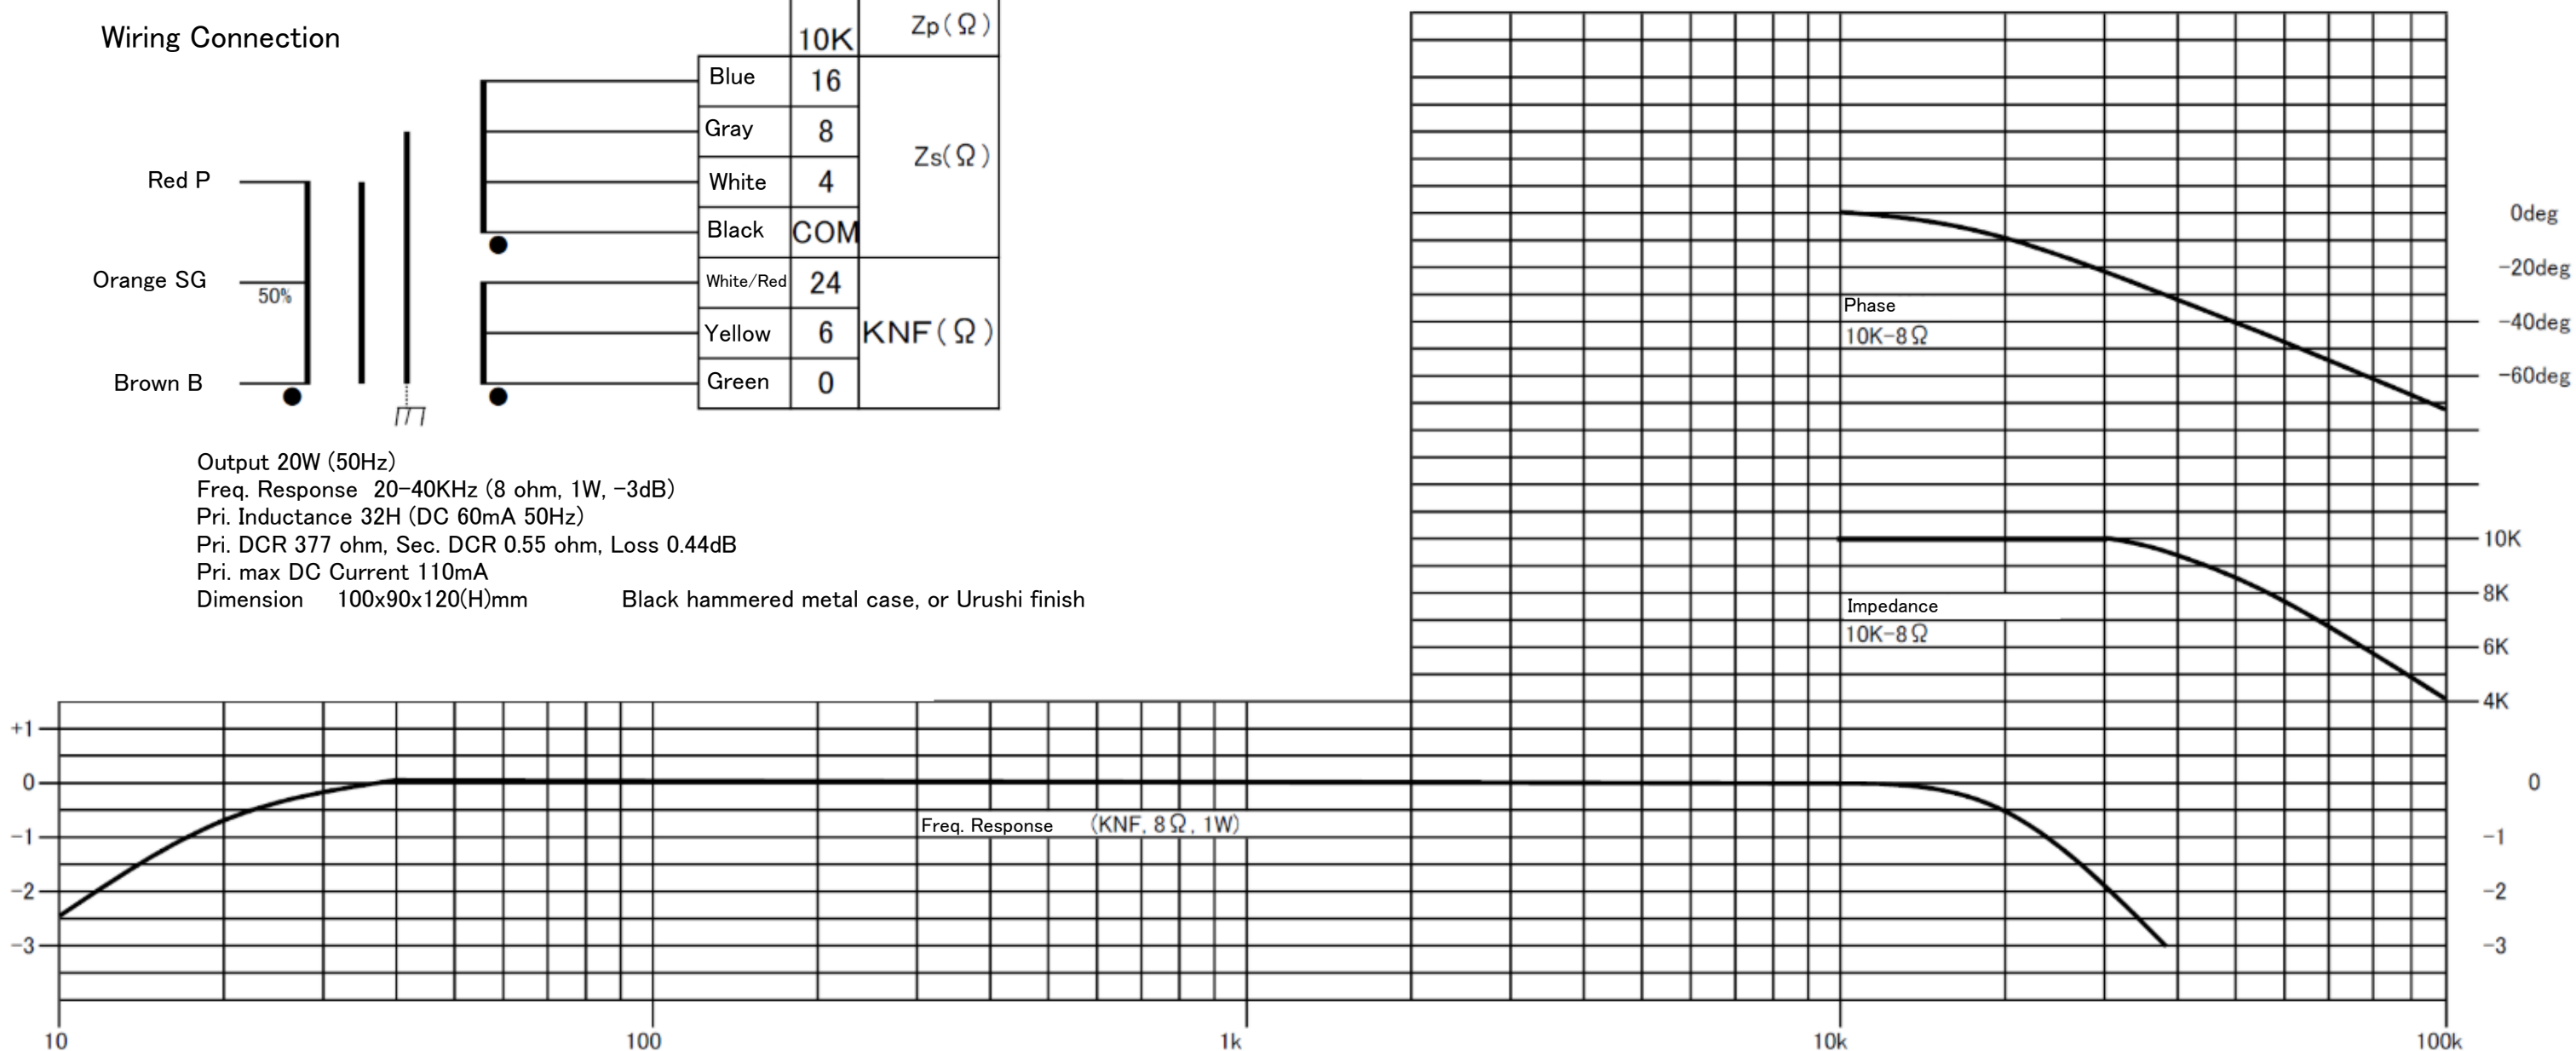

Email: [CleanUnderwear@gmail.com](mailto:CleanUnderwear@gmail.com)  
 Web: [TheAudioFeast.com](http://TheAudioFeast.com)  
 Distributed by Audio Feast (Nashville, TN, USA)  
 Final finish by Teramoto (Myoko, Japan)  
 Designed by General Ind. (Saitama, Japan)

Available on Black metal case OR  
Urushi finish

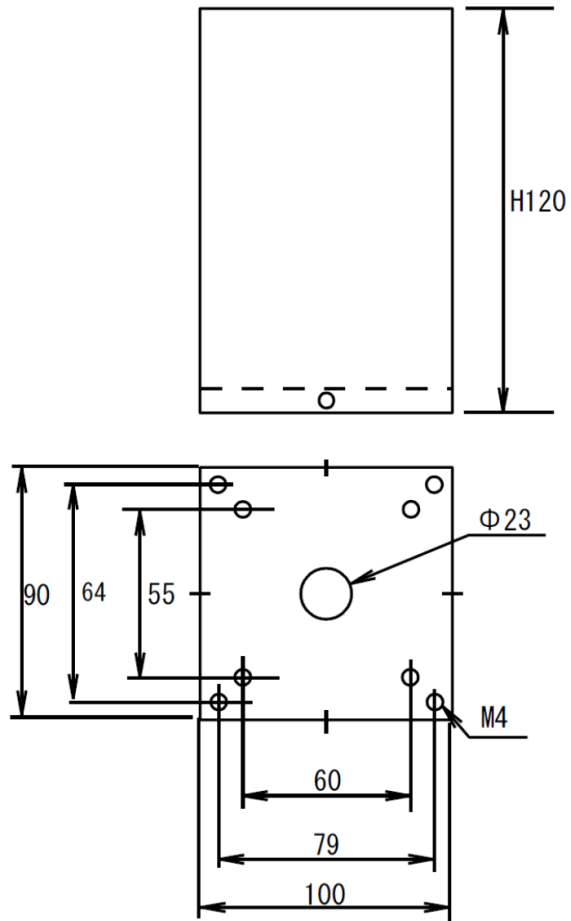

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

