




FM-10K-600CT

FINEMET® NANOCRYSTALLINE Core Line Input/Output Transformer

Audio Feast

Wiring Connection

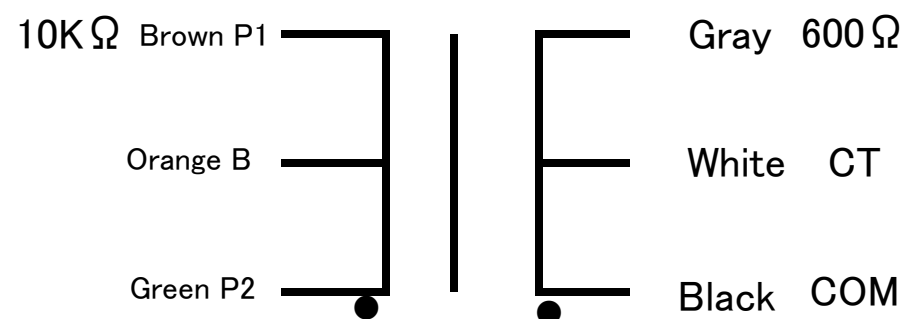

Ratio 1:0.25

Freq. Response 20-60kHz (-1dB, input 6V, 10k ohm)

Pri. Inductance 80H (100Hz)


Pri. DCR 308 ohm (P1-B)/308 ohm (B-P2)

Sec. DCR 40 ohm (com-600 ohm)

Sec. max DC current DC25mA(SET 10k ohm),

DC50mA(SET 2.5k ohm), DC100mA(PP 10k ohm)

Dimension 85x57x54(H)mm Band Style

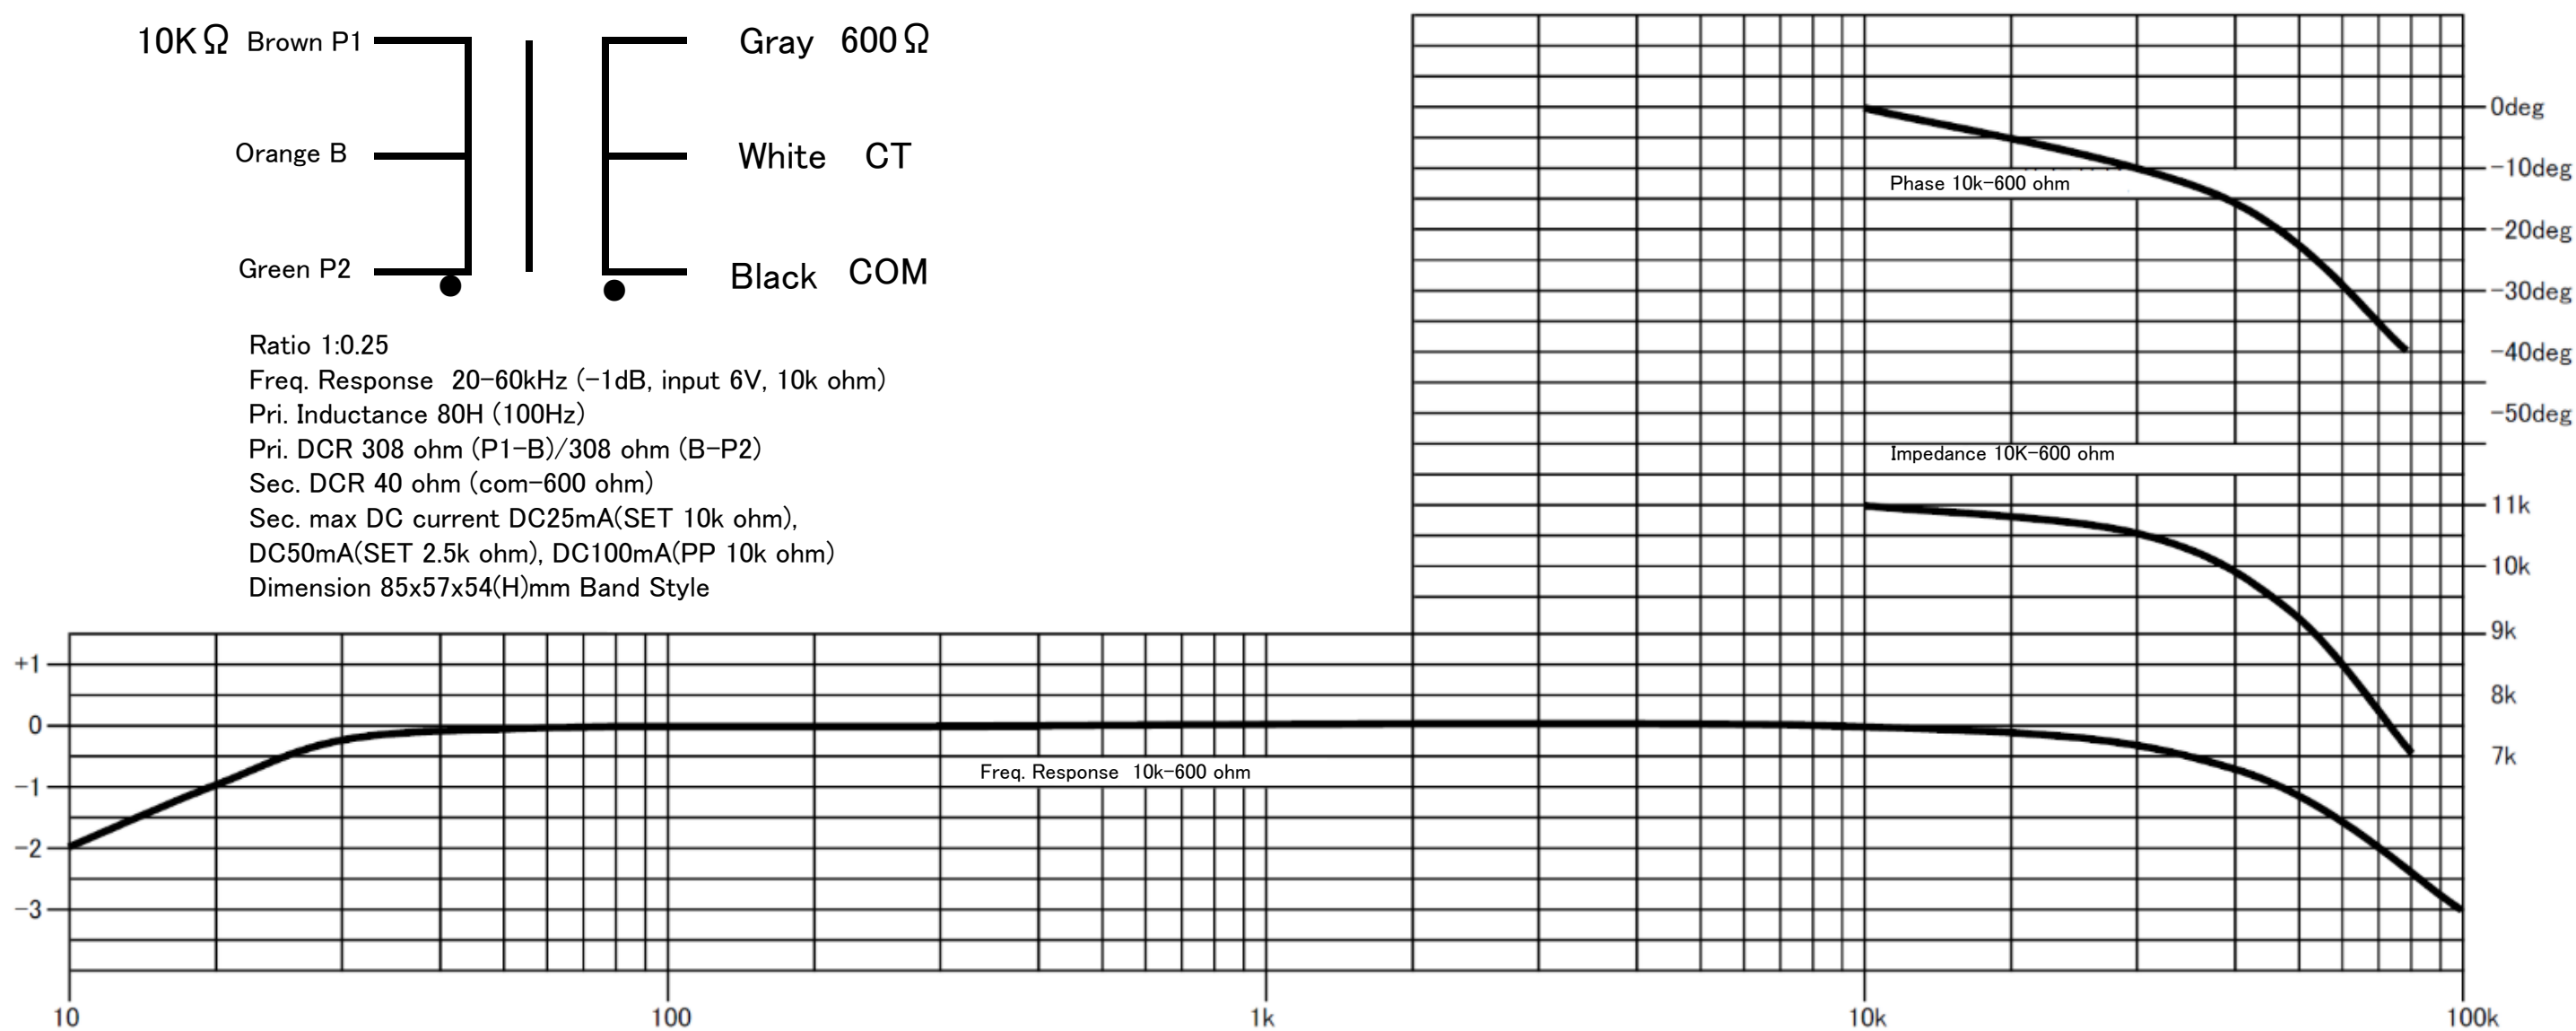

Email: CleanUnderwear@gmail.com

Web: TheAudioFeast.com

Distributed by Audio Feast (Nashville, TN, USA)

Final finish by Teramoto (Myoko, Japan)

Designed by General Ind. (Saitama, Japan)

Oct. 2018