




FM-1010N

FINEMET® NANOCRYSTALLINE Core Input /output Transformer

Audio Feast

### Wiring Connection

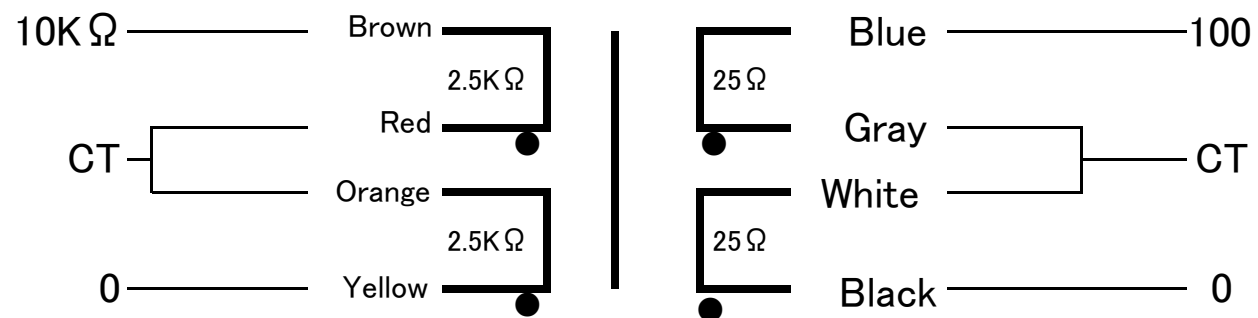

Secondary can be wired to 100 or 25 ohm.

Ratio 1:0.264

Freq. Response 16-70kHz (-3dB 0.775V 0dB)


Pri. Inductance 80H (40Hz)

Pri. DCR 337 ohm (Brown-Red)/337 ohm (Orange-Yellow)

Sec. DCR 31 ohm (Blue-Gray)/31 ohm (White-Black)

Pri. max DC current 20mA

Dimension 50x55x90(H)mm Black hammered metal case, or Urushi finish

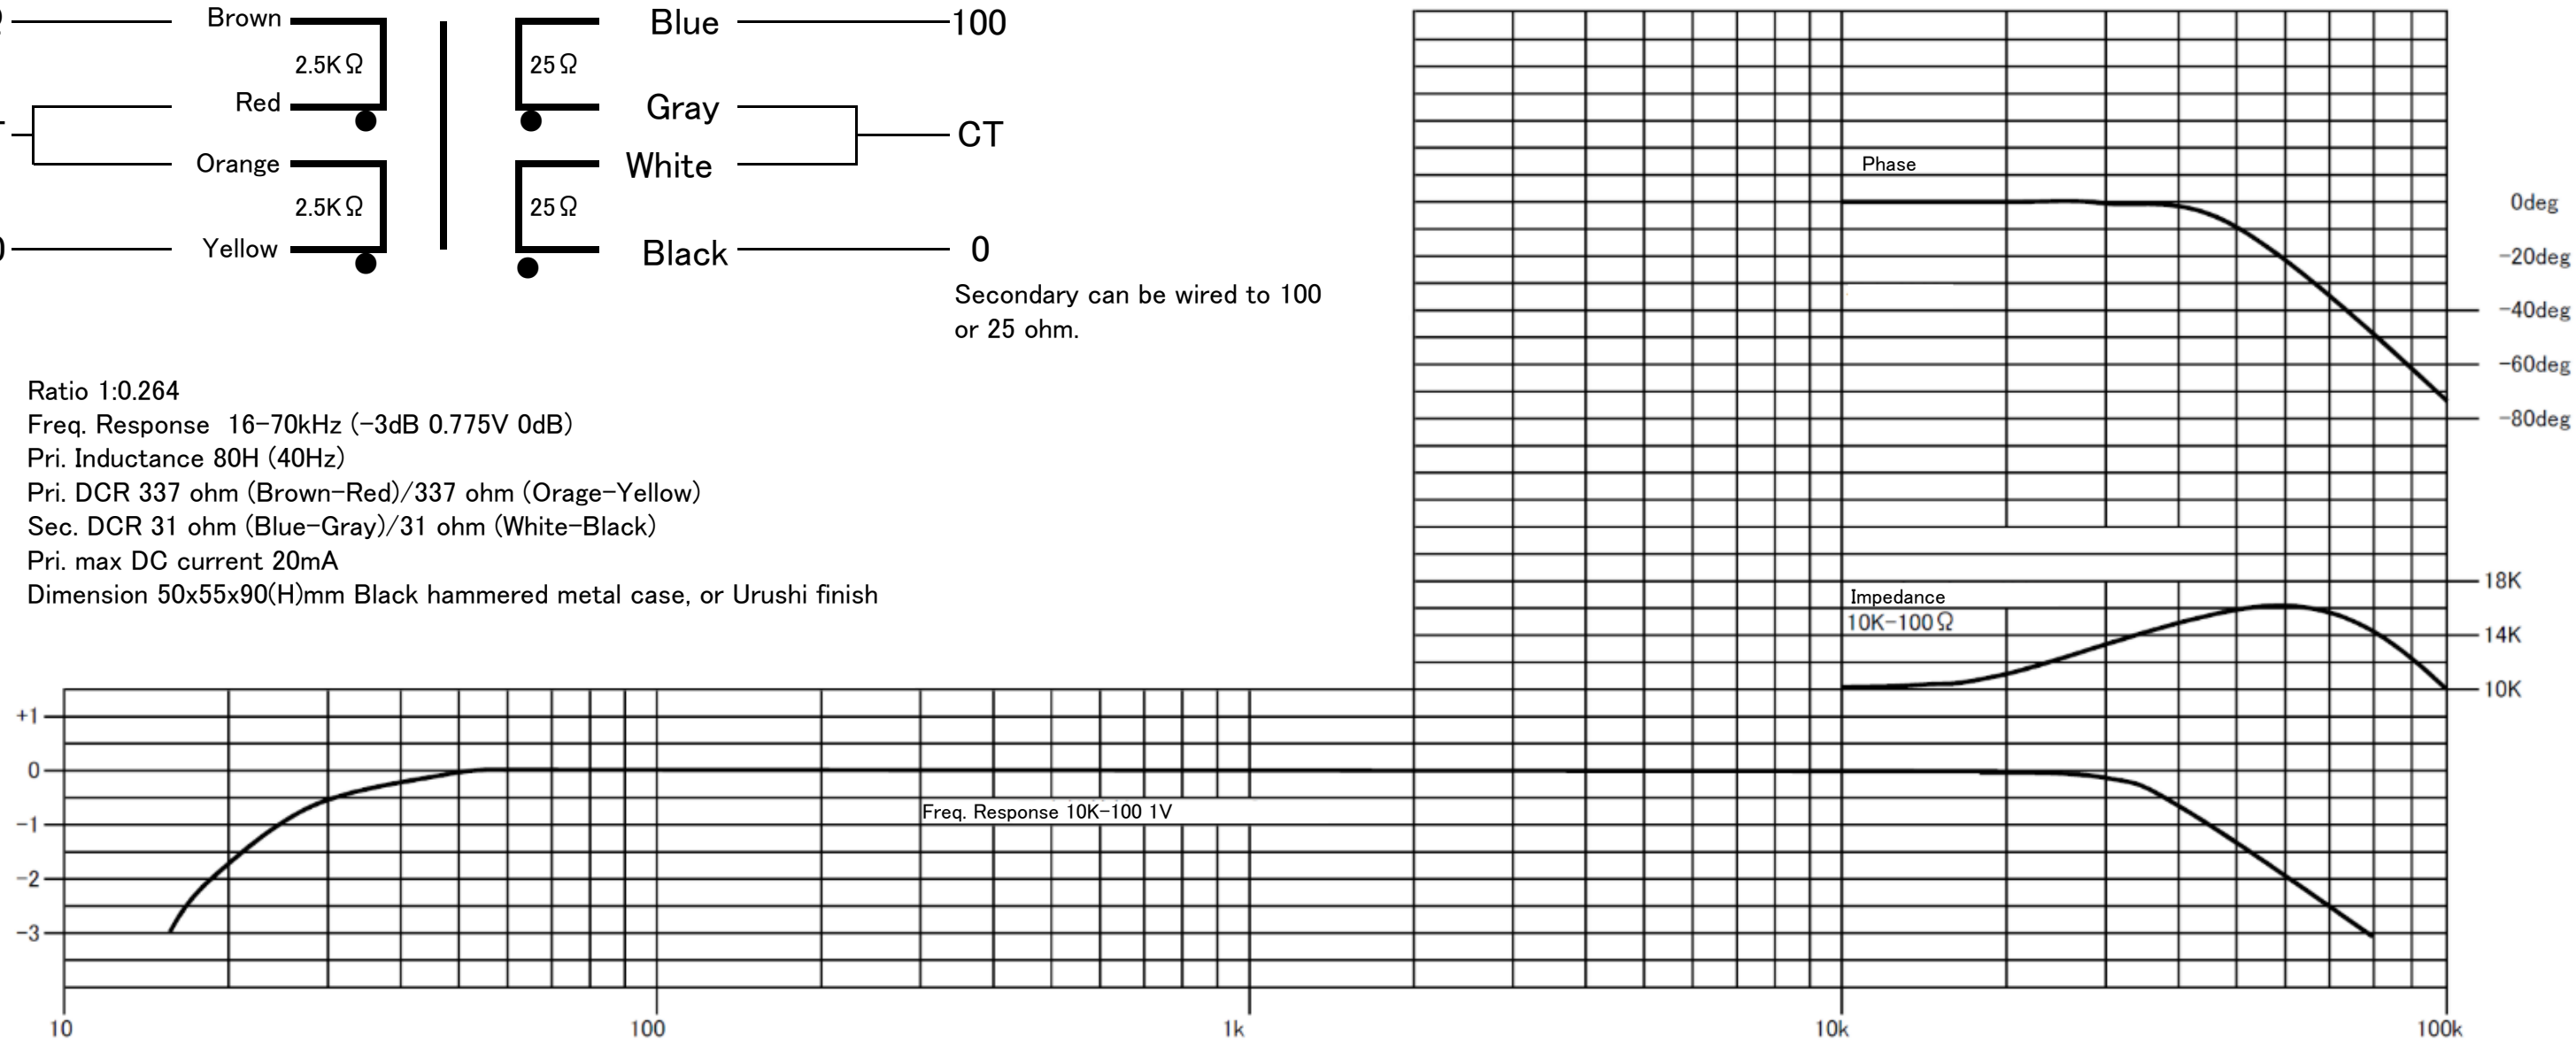

Email: [CleanUnderwear@gmail.com](mailto:CleanUnderwear@gmail.com)

Web: [TheAudioFeast.com](http://TheAudioFeast.com)


Distributed by Audio Feast (Nashville, TN, USA)

Final finish by Teramoto (Myoko, Japan)

Designed by General Ind. (Saitama, Japan)

Oct. 2018

Available on Black metal case OR  
Urushi finish

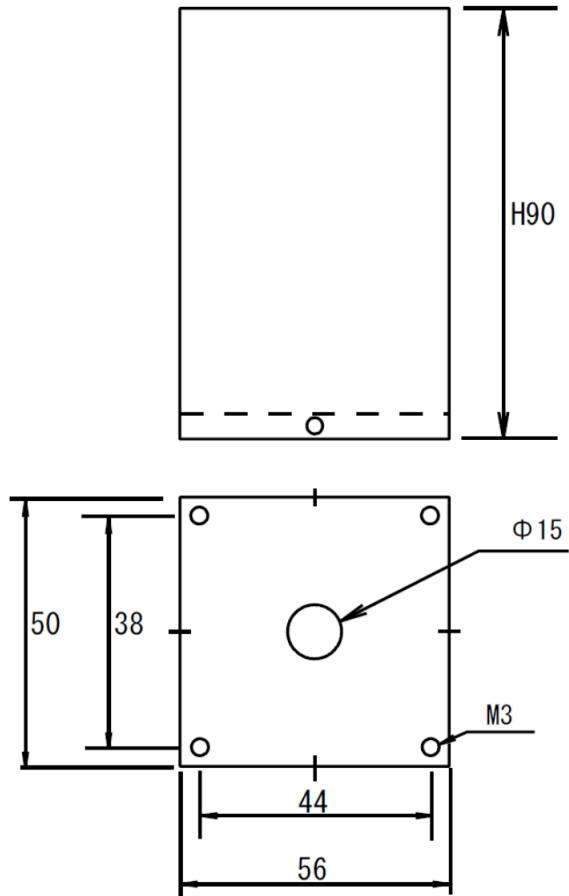

Black Metal Case



Urushi finish

All dimension is in mm.

Dimension does not include screws around the case.

