




FM-10-600CT

FINEMET® NANOCRYSTALLINE Core Line/Input/Driver Transformer


Audio Feast

This transformer is designed to be both input or output transformer.

Wiring Connection

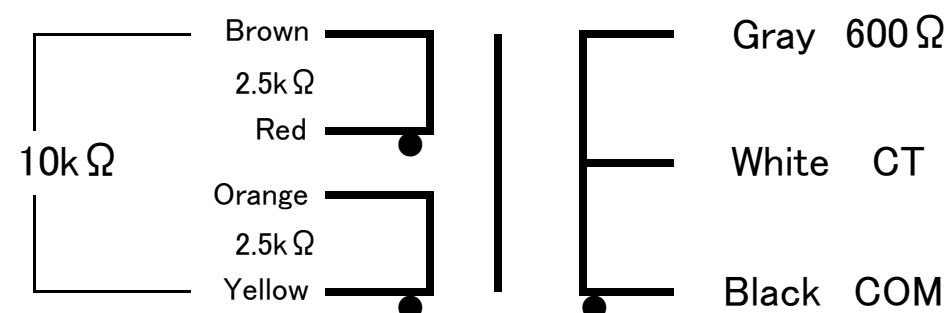

Ratio 1:0.25
 Freq. Response 20~60kHz(-1dB Input6V 10kΩ) Max Output Voltage 10V (15Hz)
 Pri. Inductance 80H(100Hz)
 Pri. DCR Brown-Red(308Ω)/Orange-Yellow(308Ω) Sec. DCR COM-600Ω(40Ω)
 Pri. max DC Current DC25mA(SET10kΩ) DC50mA(SET2.5kΩ) DC100mA(PP10kΩ)
 Dimension 85x57x54(H)mm

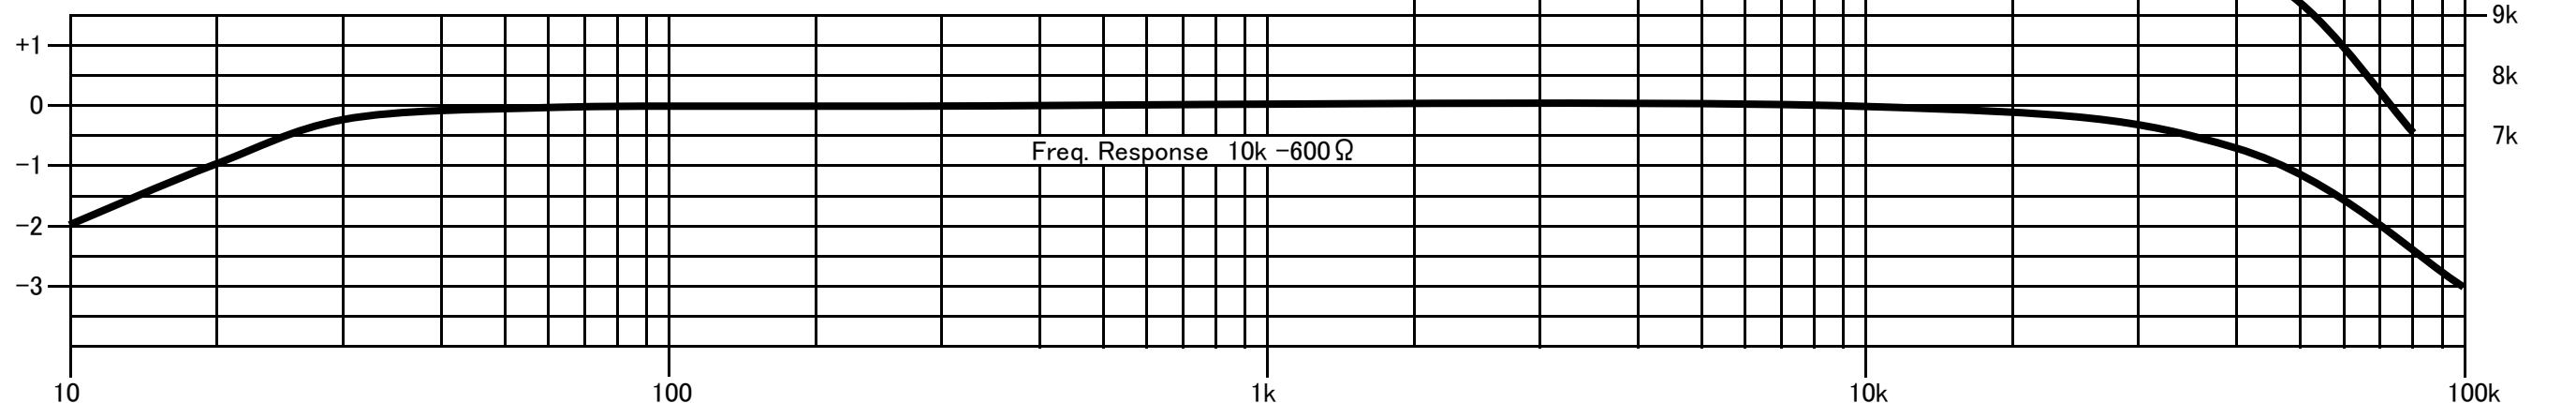

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)