






**FM-5K-600CT** Audio Feast  
FINEMET® NANOCRYSTALLINE Core SET Output Transformer (can apply DC current on Pri.)

### Wiring Diagram

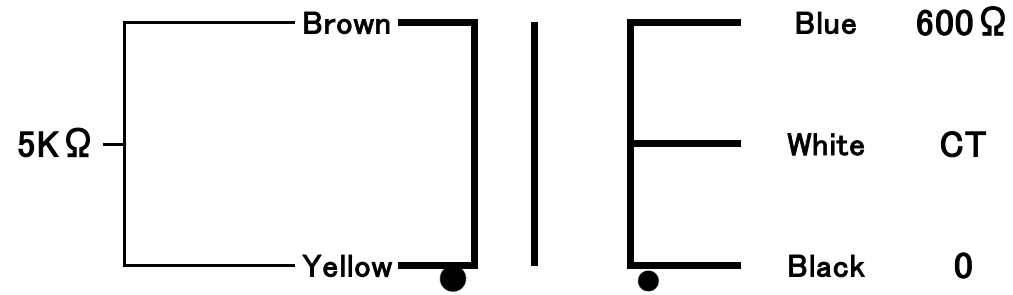

- Ratio 1:0.35(600Ω)
- Freq. Response 20Hz~70kHz(-3dB 0.775V 0dB)
- Pri. Inductance 33H(40Hz)
- Pri. DCR 380Ω
- Sec. DCR 72Ω(0-600Ω)
- Pri. Max. Current 45mA
- Dimension Black Metal Case 63x63x100(H) Mounting Screw Pitch 51X51 M

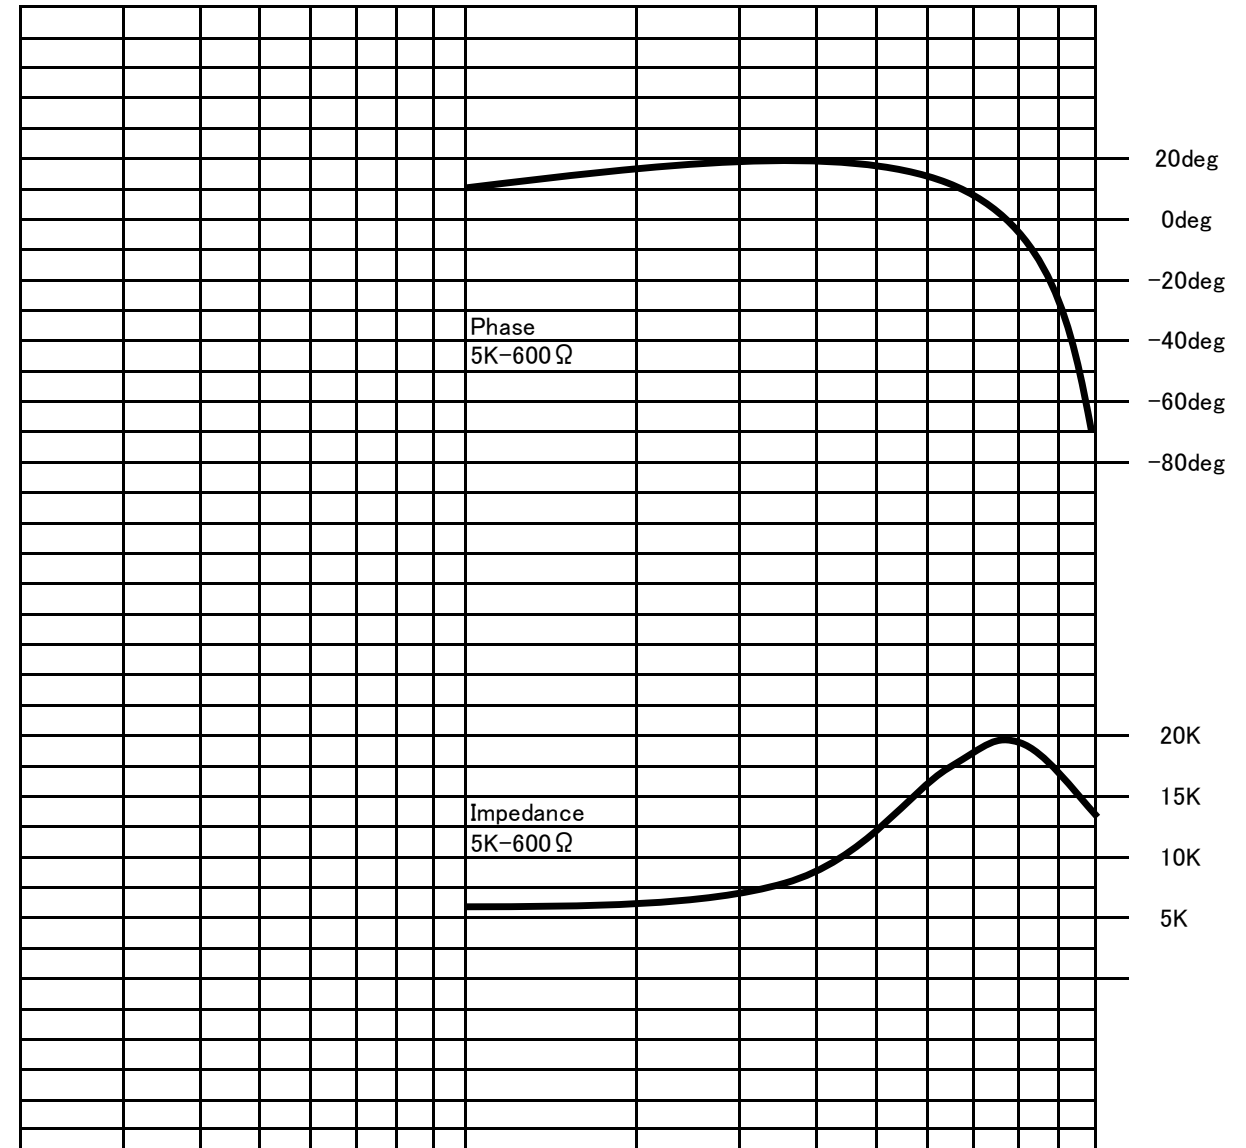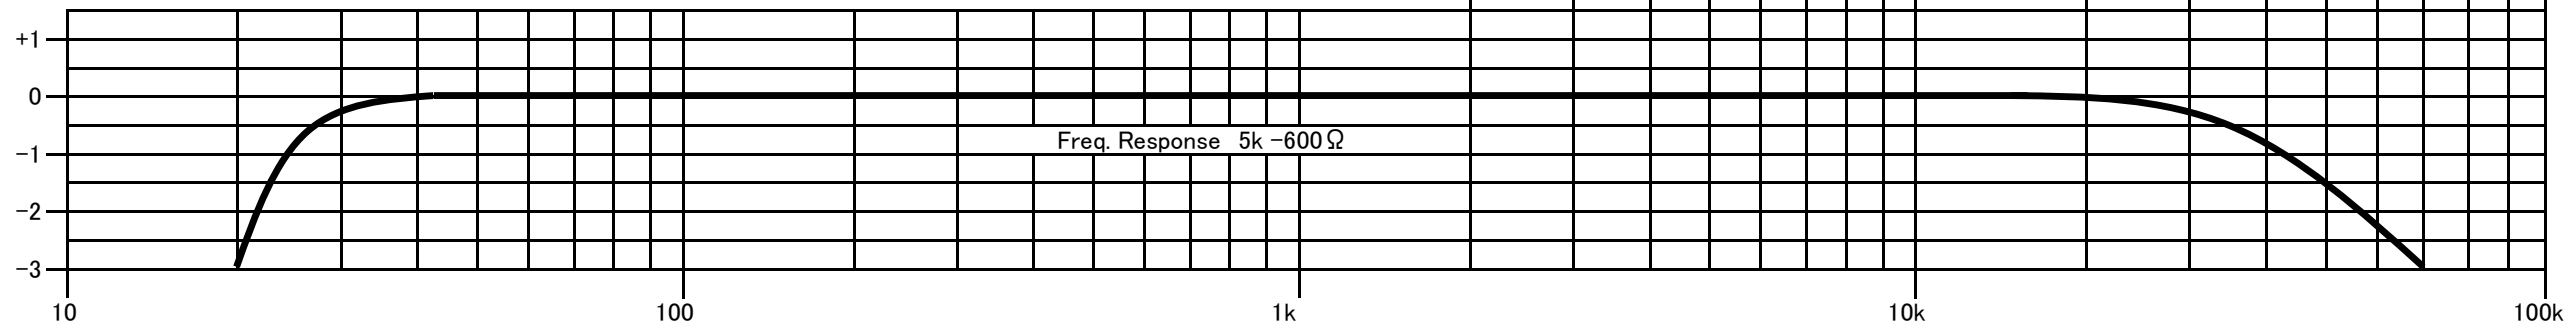

Email: [CleanUnderwear@gmail.com](mailto:CleanUnderwear@gmail.com)  
Web: [TheAudioFeast.com](http://TheAudioFeast.com)  
Distributed by Audio Feast (Nashville, TN, USA)  
Final finish by Teramoto (Myoko, Japan)  
Designed by General Ind. (Saitama, Japan)  
Dec-19