


15 Plafo>The LED Panel Plafo Square

62130AF/W/W

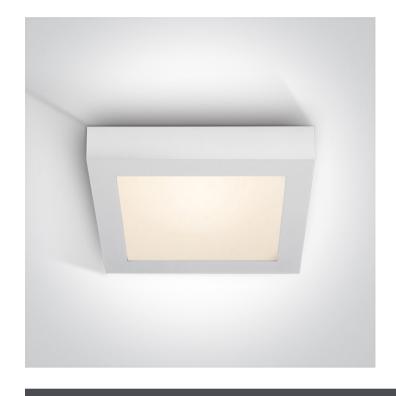

30W LED slim plafo light, IP40, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions

I	300mm		
		300mm	7 — 39mm

Physical Specification

15 Plafo
The LED Panel Plafo Square
62130AF/W/W
White
Die Cast
Rectangular
300mm
300mm
39mm
Yes
Yes
No

Flootrical	Characteristics
Elecuicai	Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	28V
Safety Class	
Power(Watts)	28W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Zhaochi
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	21-28W
Power Factor	0,9
Constant Current	Yes
700mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KEGU
Illumination Data	
Colour Temperature	3000K
Lumen Output	1957lm
Light Efficiency	72,46lm/W
CRI	80
Illumination Diagram	
Packing Info	
Box Length	32cm
Box Width	31,5cm
Box Height	4,5cm
Box Weight	2,2kg
Pcs/Carton	10
Barcode	5291889035923
HS Code	9405409900

Warranty	2 Years
Weee Directive	Yes

Certification & Warranty