## **CITY OF LUCAS**

## REQUEST FOR BID

(Bid # 007-17)

Project Title: Winningkoff Trailhead

Proposal Closing Date: 2:00pm (CST),

Wednesday April 12, 2017

## Winningkoff Trailhead Project Bid #007-17



The City of Lucas is seeking bids for a Winningkoff Trailhead Project. The City of Lucas has a fully funded parks type project with the following features: 1) estimated 512 feet of split rail fence; 2) 28,000 square feet of

crushed gravel parking; 3) 600 square feet of crushed granite walking path; 4) 260 square-foot cedar pavilion with gable ends with Class C shingles on the roof; 5) four picnic tables; 6) septic system for restroom provided by others; and 7) electric service including meter panel for the above proposed pavilion including two over head lights and two outlets with enough power remaining to service a 50 amp sub-panel.

Sealed bids labeled "Winningkoff Trailhead Project Bid #007-17" for this work shall be submitted to the City of Lucas Attention: Linezka Maduro, Purchasing by 2 p.m. (Central Daylight Time) on Wednesday, April 12, 2017, at City of Lucas City Hall (665 Country Club Road, Lucas, Texas 75002-7651). Bids received after 2 p.m. on April 12, 2017, will not be opened and will be destroyed.

Any questions regarding the project may be addressed to jhilbourn@lucastexas.us.

The City reserves the option to reject all bids

The bid shall include the following items:

1)	Bidder's Company Name  Contact Name						
Address							
	Telephone Number						
	Emai	l Address					
2)	Forms:						
,		Insurance Certification					
		Texas Ethics Commission Conflict of Interest Questionnaire (CIQ) Form					
		https://www.ethics.state.tx.us/forms/CIQ.pdf					
		Texas Ethics Commission Form 1295 (Notarized)					
		https://www.ethics.state.tx.us/whatsnew/elf_info_form1295.htm					

☐ IRS Form W-9 (Request for Taxpayer Identification Number and Certification) https://www.irs.gov/pub/irs-pdf/fw9.pdf

## 3) Project Elements and Prices

Item No.	Description	Unit	Estimated Bid	Unit Price	Total Amount
			Quantity		
	Pavilion w/material, installation,				
1	"Turn Key"	SF	260		
2	Picnic Tables (Assembled)	EA	4		
3	Electric Installation for Pavilion	LS	1		
4	Split Rail Cedar Fence	LF	512		
5	Crushed Granite Parking Lot	SF	28,000		
6	Electric Installation for Restroom	LS	1		
7	Aerobic Septic System	EA	1		
8	Xeriscape Landscaping	SF	120		
9	Transformer	EA	1		
10	Electrical Service Panel	EA	1		
11	Gravel walkway	SF	600		
Total					


Blue arrows are location of cedar split rail fence

Crushed gravel parking

Pavilion


Coral by others

Bathroom by others

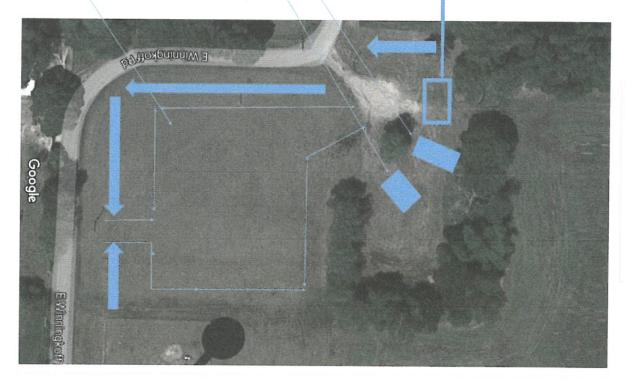



Bathroom or similar by others

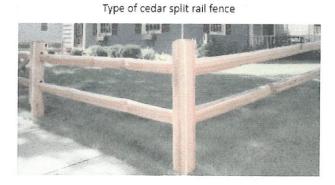

Cedar pavilion or similar





Bathroom or similar by others



Type of cedar split rail fence

