



4x10W COB Moving head spot Pendant, IP20 .

Complete with driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads





Dimensions




Physical Specification

| | |
|-------------------|------------------------------|
| Item Group | 17 Pendants |
| Family | The COB Moving Heads Pendant |
| Order Code | 65110P/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Rectangular |
| Length | 800mm |
| Width | 60mm |
| Suspended Ceiling | Yes |
| Indoor | Yes |
| Adjustable | 2 Directions |

| Gear | Built In |
|------------------|---|
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 4x10W |
| IP Rating | IP20 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |
| Fitting | |
| Input Type | Constant Current |
| Input Current | 1000mA |
| Voltage | 36V |
| Power(Watts) | 36W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Epistar |
| Gear | |
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 27-42W |
| Power Factor | 0,9 |

| |
|------------------|
| Constant Current |
| 1000mA |
| IP Rating |
| Safety Class |
| Dimmable |
| Housing Material |
| Manufacturer |

| |
|---|
| Yes |
| 27-42V |
| IP20 |
|  |
| No |
| Plastic |
| Eaglerise |

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Beam Angle |
| Illumination Diagram |


| |
|---|
| 3000K |
| 4x900lm |
| 90lm/W |
| 80 |
| 60° |
|  |

Packing Info

| |
|------------|
| Box Weight |
| Pcs/Carton |
| Barcode |
| HS Code |

| |
|---------------|
| 4,3kg |
| 2 |
| 5291889054047 |
| 9405409900 |

Energy Label

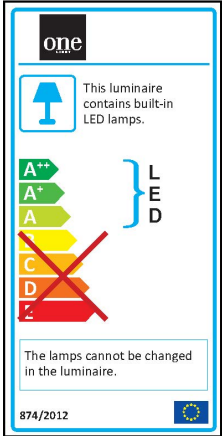

Warranty

2 Years

Weee Directive

Yes