


## 10 Track Spots>The COB Track Spot Range Aluminium

# 65611NT/B/C

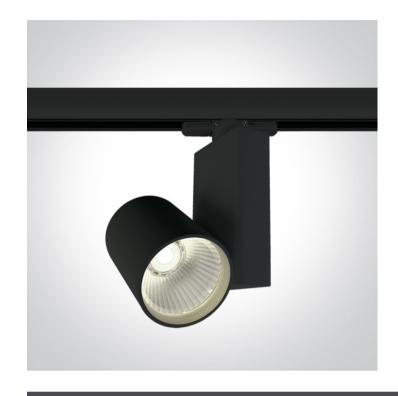

15W track spot with COB LED, ideal for shops and showrooms.

Complete with driver.

Complies with standard EN60598-1 and any other specific standards.



#### Downloads









#### Dimensions



#### Related items







40003A/B


### **Physical Specification**

Item Group	10 Track Spots
Family	The COB Track Spot Range Aluminium
Order Code	65611NT/B/C
Colour	Black
Material	Aluminium
Shape	Circular
Height	110mm

	80mm
Track mounted	Yes
Indoor	Yes
Adjustable	2 Directions
lectrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Fitting	
Input Type	Constant Current
Input Current	400mA
Voltage	36V
Safety Class	
Power(Watts)	14,4W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Sanan
Gear	

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	10-16W
Power Factor	0,9
Constant Current	Yes
400mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Lifud
Protection	Short Circuit Protection
Illumination Data	
IIIUITIII alion Dala	
	4000K
Colour Temperature	4000K 1300lm
Colour Temperature  Lumen Output	1300lm
Colour Temperature  Lumen Output  Light Efficiency	1300lm 86,67lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	1300lm 86,67lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	1300lm 86,67lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	1300lm 86,67lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	1300lm 86,67lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	1300lm 86,67lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	1300lm 86,67lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	1300lm  86,67lm/W  80  38°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length	1300lm  86,67lm/W  80  38°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width	1300lm  86,67lm/W  80  38°  25cm  13cm
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height	1300lm  86,67lm/W  80  38°  25cm  13cm  10cm
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height  Pcs/Carton	1300lm  86,67lm/W  80  38°  25cm  13cm  10cm

## Energy Label



Certification	& W	/arrantv

Warranty	2 Years
Weee Directive	Yes