


10 Track Spots>The COB Track Spot Range Aluminium

65612NT/B/C

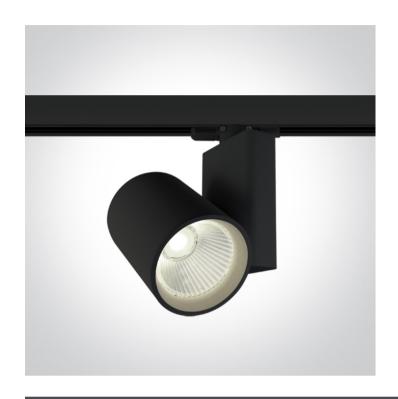

30W track spot with COB LED, ideal for shops and showrooms.

Complete with driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions



Related items







40003A/B

Physical Specification

Item Group	10 Track Spots
Family	The COB Track Spot Range Aluminium
Order Code	65612NT/B/C
Colour	Black
Material	Aluminium
Shape	Circular
Height	123mm

Diameter	90mm
Track mounted	Yes
Indoor	Yes
Adjustable	2 Directions
ectrical Characteristics	
Gear	Built In
Fitting , Driver	
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Fitting	
Input Type	Constant Current
Input Current	750mA
Voltage	38V
Safety Class	
Power(Watts)	28,5W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Bridgelux
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25-30W
Power Factor	0,9
Constant Current	Yes
750mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Lifud
Protection	Short Circuit Protection
llumination Data	
llumination Data	
Colour Temperature	4000K
	4000K 2500lm
Colour Temperature	
Colour Temperature Lumen Output	2500lm
Colour Temperature Lumen Output Light Efficiency	2500lm 83,33lm/W
Colour Temperature Lumen Output Light Efficiency CRI	2500lm 83,33lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	2500lm 83,33lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	2500lm 83,33lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	2500lm 83,33lm/VV 90 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	2500lm 83,33lm/W 90 38°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	2500lm 83,33lm/W 90 38° 25cm 10cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height	2500lm 83,33lm/W 90 38° 25cm 10cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton	2500lm 83,33lm/W 90 38° 25cm 10cm 10cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton Barcode	2500lm 83,33lm/W 90 38° 25cm 10cm 10cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton	2500lm 83,33lm/W 90 38° 25cm 10cm 10cm

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

Certification & Warranty