

## 14 Wall & Ceiling LED>Outdoor Wall Cylinders

# 67138F/G/W




6W Outdoor Wall Cylinder, IP54.

Complete with driver.

Complies with standard EN60598-1 and any other specific standards.



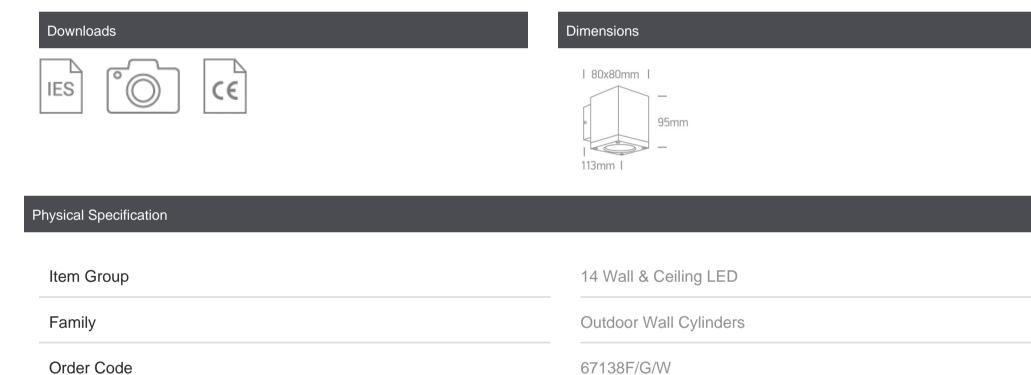

Colour

Material

Shape

Length

80mm

67138F/G/W

Grey

**Die Cast** 

Rectangular

| Width        | 80mm |
|--------------|------|
| Height       | 95mm |
| Surface Wall | Yes  |
| Indoor       | Yes  |
| Outdoor      | Yes  |

| Gear             | Built In     |
|------------------|--------------|
|                  |              |
| Fitting + Driver |              |
| Input Voltage    | 100-240V     |
| 50 Hz            | Yes          |
| 60 Hz            | Yes          |
| Safety Class     |              |
| Power(Watts)     | 6W           |
| IP Rating        | IP54         |
| Light Source     | LED built in |
| Dimmable         | No           |
| F Mark           | F            |

#### Fitting

| Input Type    | C  |
|---------------|----|
| Input Current | 5  |
| Voltage       | 1  |
| Safety Class  | <  |
| Power(Watts)  | 5  |
| IP Rating     | IF |
| Light Source  | L  |
| LED Type      | C  |
| LED Brand     | E  |

| Constant Current |
|------------------|
| 500mA            |
| 10V              |
|                  |
| 5W               |
| IP54             |
| LED built in     |
| СОВ              |
| Edison           |
|                  |

| Gear Type     | Led Driver |
|---------------|------------|
| Input Voltage | 100-240V   |
| 50 Hz         | Yes        |
| 60 Hz         | Yes        |
| Power(Watts)  | 3-6W       |
|               |            |


| Power Factor     | 0,5       |
|------------------|-----------|
| Constant Current | Yes       |
| 500mA            | 6-12V     |
| IP Rating        | IP20      |
| Safety Class     |           |
| Dimmable         | No        |
| Ambient Temp     | 50°C      |
| Operating Temp   | 70°C      |
| Brand            | Eaglerise |
|                  |           |

#### Illumination Data

| Colour Temperature   | 3000K     |
|----------------------|-----------|
| Lumen Output         | 440lm     |
| Light Efficiency     | 73,33lm/W |
| CRI                  | 80        |
| Beam Angle           | 35°       |
| Illumination Diagram |           |

### Packing Info

| Pcs/Carton | 12            |
|------------|---------------|
| Barcode    | 5291889024279 |
| HS Code    | 9405409900    |



| Certification & Warranty |         |
|--------------------------|---------|
| Warranty                 | 2 Years |
| Weee Directive           | Yes     |