


14 Wall & Ceiling LED>Outdoor Slim Range Up & down beam

67412/AN/W

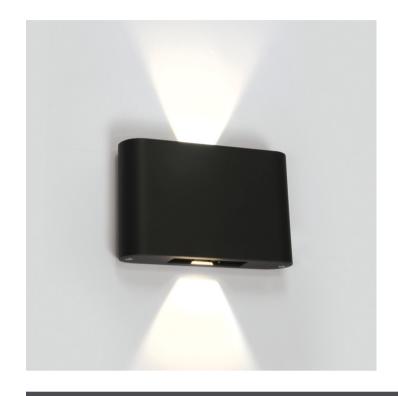

2x6W LED wall light with adjustable beam, ideal for both indoor and outdoor installation.

Complete with 500mA driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads







Dimensions



Physical Specification

Item Group	14 Wall & Ceiling LED
Family	Outdoor Slim Range Up & down beam
Order Code	67412/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	180mm
Width	42mm
Height	115mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

Gear

Gear Type

Input Voltage

Electrical Characteristics Gear Built In Fitting + Driver Input Voltage 220-240V 50 Hz Yes 60 Hz Yes Safety Class Power(Watts) 2x6W IP Rating IP54 Light Source LED built in Dimmable No F F Mark Fitting


Input Type	Constant Current
Input Current	500mA
Voltage	10V
Safety Class	(III)
Power(Watts)	5W
IP Rating	IP54
Light Source	LED built in
LED Type	СОВ
LED Brand	Edison
F Mark	F

Led Driver

220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	6-12W
Power Factor	0,5
Constant Current	Yes
500mA	12-24V
IP Rating	IP20
Safety Class	
Brand	Eaglerise
Protection	0
lumination Data	
lumination Data	
lumination Data Colour Temperature	3000K
	3000K 2x400lm
Colour Temperature	
Colour Temperature Lumen Output	2x400lm
Colour Temperature Lumen Output Light Efficiency	2x400lm 66,67lm/W
Colour Temperature Lumen Output Light Efficiency CRI	2x400lm 66,67lm/W
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram	2x400lm 66,67lm/W
Colour Temperature Lumen Output Light Efficiency CRI	2x400lm 66,67lm/W
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram	2x400lm 66,67lm/W
Colour Temperature Lumen Output Light Efficiency CRI Illumination Diagram	2x400lm 66,67lm/W 80

Energy Label



Warranty	2 Years
Weee Directive	Yes

Certification & Warranty