


### 14 Wall & Ceiling LED>Outdoor Slim Range Up & down beam

# 67412/W/W

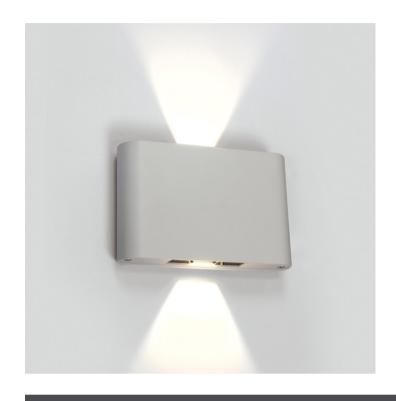

2x6W LED wall light with adjustable beam, ideal for both indoor and outdoor installation.

Complete with 500mA driver.

Complies with standard EN60598-1 and any other specific standards.




#### Downloads







#### Dimensions



#### **Physical Specification**

Item Group	14 Wall & Ceiling LED
Family	Outdoor Slim Range Up & down beam
Order Code	67412/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	180mm
Width	42mm
Height	115mm
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes

## **Electrical Characteristics** Gear Built In Fitting + Driver Input Voltage 220-240V 50 Hz Yes 60 Hz Yes Safety Class Power(Watts) 2x6W IP Rating IP54 Light Source LED built in Dimmable No F F Mark Fitting Input Type **Constant Current** Input Current 500mA Voltage 10V (III) Safety Class 5W Power(Watts) IP Rating IP54 Light Source LED built in LED Type COB **LED** Brand Cree F

F Mark

Gear Type


Led Driver

Input Voltage

220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	6-12W
Power Factor	0,5
Constant Current	Yes
500mA	12-24V
IP Rating	IP20
Safety Class	
Brand	Eaglerise
Protection	0
lumination Data	
lumination Data  Colour Temperature	3000K
	3000K 2x400lm
Colour Temperature	
Colour Temperature  Lumen Output	2x400lm
Colour Temperature  Lumen Output  Light Efficiency	2x400lm 66,67lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	2x400lm 66,67lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI  Illumination Diagram	2x400lm 66,67lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	2x400lm 66,67lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI  Illumination Diagram	2x400lm 66,67lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI  Illumination Diagram	2x400lm 66,67lm/W 80

### Energy Label



Warranty	2 Years
Weee Directive	Yes

Certification & Warranty