



CITY OF PETALUMA

POST OFFICE BOX 61
PETALUMA, CA 94953-0061

ADDENDUM NO. 2

McNear Park Sewer Main Replacement Project and McNear Park Water Main Replacement Project City Project Numbers C66402143 and C67502020

January 25, 2021

This Addendum No. 2 modifies the Bidding Documents for the McNear Park Sewer Main Replacement Project and McNear Park Water Main Replacement Project, City Project Numbers C66402143 and C67502020. This Addendum shall become part of the Contract and all provisions of the Contract shall apply thereto. Bidders shall acknowledge all Addendums in the Bid Schedule.

CONTRACT DRAWINGS

1. **Delete** Contract Drawing Sheet D1 in its entirety. **Replace** with Contract Drawing D1 included in this Addendum No. 2.

TECHNICAL CLARIFICATION TO CONTRACTORS – QUESTION AND RESPONSE

Question #1: The details within the drawings show no “T-cut” for the trench repaving but City Standard Detail 219 for trench paving shows a “T cut”. Please clarify?

Response #1: *A new detail sheet for trench paving has been issued and is part of this addendum. The original ‘Detail 1’ shown in the drawing was meant to show pipe trench information in areas where pavement rehabilitation was to take place. Trench repaving in areas where no pavement rehabilitation is being done shall adhere to City Standard Detail 219. The new ‘Detail 1’ shown on Sheet D1 reflects this.*

Question #2: For work done in residential backyards, is landscaping replacement to be included?

Response #2: *The contractor shall return disturbed areas to pre-construction conditions in all areas of construction. The contractor shall expect some landscaping replacement to occur and possible fence replacement if existing fence is not preserved or protected in place. This work shall be included in the linear foot price of the sewer main or other various bid items of the project.*

Teresa Barrett
Mayor

Brian Barnacle
D’Lynda Fischer
Mike Healy
Dave King
Kevin McDonnell
Dennis Pocekay
Councilmembers

Public Works & Utilities

City Engineer
11 English Street
Petaluma, CA 94952
Phone (707) 778-4303

Environmental Services
Ellis Creek Water
Recycling Facility
3890 Cypress Drive
Petaluma, CA 94954
Phone (707) 776-3777
Fax: (707) 656-4067

Parks & Facility
Maintenance
840 Hopper St. Ext.
Petaluma, CA 94952
Phone (707) 778-4303
Fax (707) 206-6065

Transit Division
555 N. McDowell Blvd.
Petaluma, CA 94954
Phone (707) 778-4421

Utilities & Field Operations
202 N. McDowell Blvd.
Petaluma, CA 94954
Phone (707) 778-4546
Fax (707) 206-6034

E-Mail: publicworks@cityofpetaluma.org

Question #3: Who will be performing the hot-tapping procedures?

Response #3: For hot taps greater than 2-inches in size, the Contractor shall coordinate with the City to perform the hot tapping procedure per the specifications. The Contractor shall provide all fittings and valving for hot taps. For hot taps 2-inches and smaller, the Contractor shall provide all materials and equipment to perform the procedure.

Question #5: For the ADA curb ramps shown the drawings, do they include curb and gutter?

Response #5: The bid price for each grouping of ADA curb ramping shall include all Caltrans standard curb ramp, sidewalk, curbing, and curb and gutter shown on the contract drawings. Areas outside of these limits shall be paid at the bid price for sidewalk and/or curb and gutter.

Summary of Changes: Bids will be emailed into the City Clerk, and original copies of the sealed bids will be mailed in. All other items of the documents shall remain unchanged.

City of Petaluma,



Dan Herrera, P.E.
Senior Civil Engineer
Public Works & Utilities Department

A signed copy of this Addendum and the attached acknowledgement form shall be attached to the bid proposal. Failure to do so may cause rejection of your bid as being non-responsive.

ADDENDUM NO. 2

**McNear Park Sewer Main Replacement Project and
McNear Park Water Main Replacement Project
City Project Numbers C66402143 and C67502020**

January 25, 2021

ACKNOWLEDGEMENT




Receipt of Addendum No. 2 is hereby acknowledged by _____
(Contractor's Name)

on the _____ day of _____, 2021.

By: _____
Signature

Title

Company

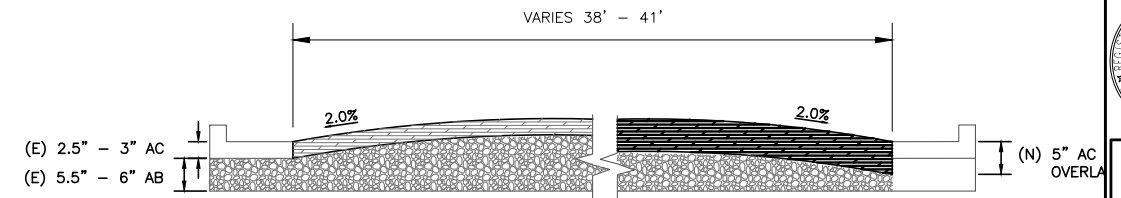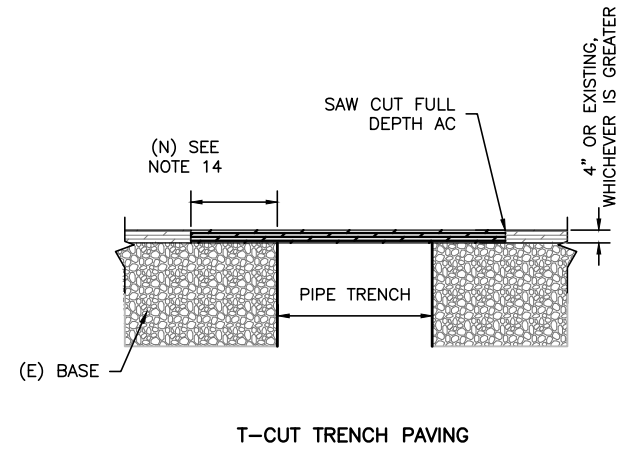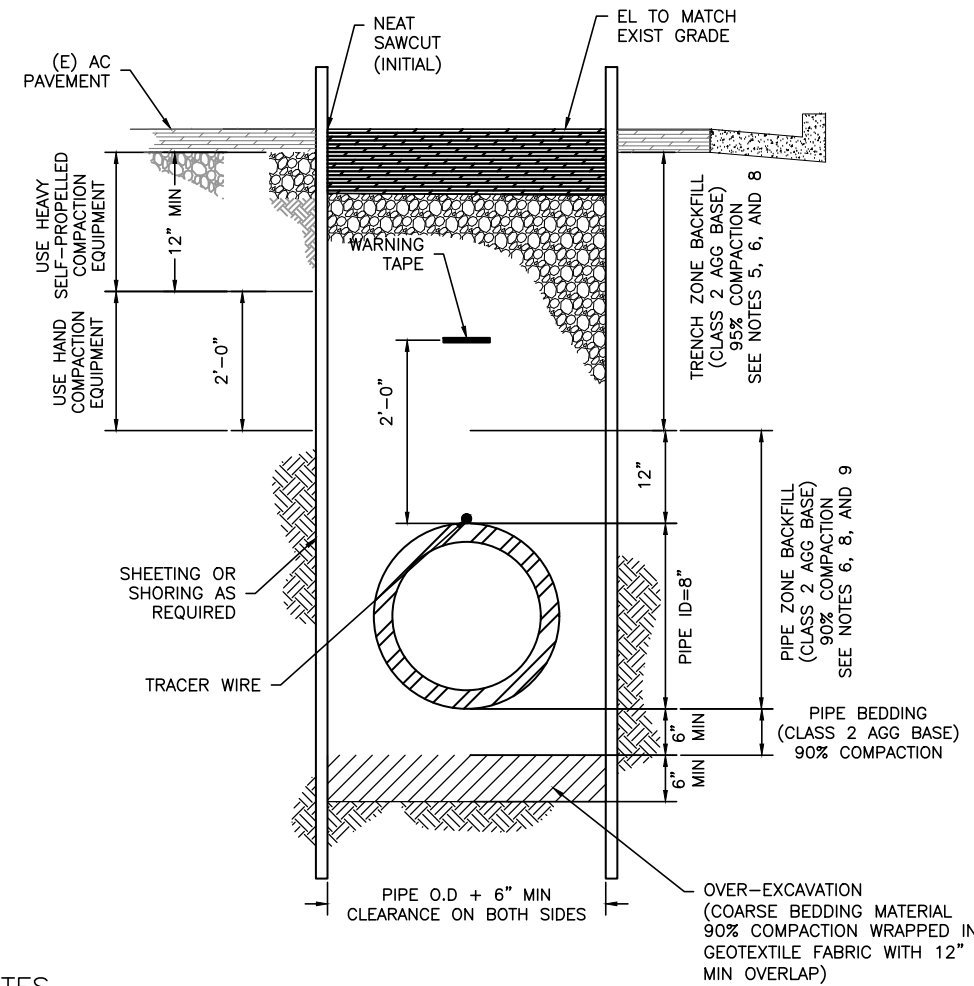

NOTES

1. THE ABOVE LEFT DETAIL APPLIES TO EXCAVATION AND TRENCHING WHERE LOCATION WILL RECEIVE NEW PAVEMENT ALONG THE ENTIRETY OF THE ROADWAY FOLLOWING CONSTRUCTION ACTIVITIES. THE ABOVE RIGHT DETAIL APPLIES TO ALL OTHER; REFER TO CITY OF PETALUMA STANDARD DETAIL 219 FOR FURTHER DETAILS.
2. VOID CREATED WHEN SHORING IS REMOVED SHALL BE BACKFILLED WITH CDF.
3. SLOPED EXCAVATIONS SHALL NOT BE PERMITTED UNLESS OTHERWISE APPROVED BY THE ENGINEER.
4. TYPICAL TRENCH DIMENSIONS:
 ID = PIPE INSIDE DIAMETER; IE NOMINAL PIPE SIZE, INCHES
 OD = PIPE OUTSIDE DIAMETER, INCHES
5. PROTECT ALL EXISTING PIPES IN VICINITY OF TRENCH.
6. FOR TRENCH ZONE BACKFILL IN PAVED AREAS AND/OR UNDER STRUCTURES AND/OR SLABS, TRENCH ZONE BACKFILL SHALL BE CLASS 2 AGGREGATE BASE AND COMPACTED AT 95%
7. PIPE ZONE BACKFILL SHALL NOT BE PLACED IN LIFTS GREATER THAN 6 INCHES. TRENCH ZONE BACKFILL SHALL NOT BE PLACED IN LIFTS GRATER THAN 8 INCHES. CONTRACTOR SHALL DEMONSTRATE THAT SPECIFIED COMPACTION CAN BE ACHIEVED WITH THE SPECIFIED LIFTS THROUGH DENSITY TESTS.
8. TRENCHING SHALL CONFORM TO THE "CONSTRUCTION SAFETY ORDER OF THE STATE OF CALIFORNIA" AND SECTION 6705 OF THE CALIFORNIA LABOR CODE.
9. WHERE ADEQUATE COMPACTION CANNOT BE ACHIEVED ABOVE CROWN OF PIPE DUE TO OBSTRUCTION OF OTHER CONDITIONS, REPLACE PIPE ZONE BACKFILL AND/OR TRENCH ZONE BACKFILL WITH CDF AS DIRECTED THE ENGINEER.
10. WHERE EXISTING FENCING, LANDSBLIND FLANGEING, AND/OR IRRIGATION FACILITIES ARE REMOVED AND/OR DAMAGED DURING WORK, CONTRACTOR SHALL RESTORE AND/OR REPLACE IN KIND. IN UNPAVED AREAS, PROVIDE HYDROSEEDING.
11. BLASTING OF EXCAVATION MATERIALS IS NOT PERMITTED.
12. TRACER WIRE AND WARNING TAPE SHALL BE USED ON ALL BURIED PIPING.
13. PROVIDE AND MAINTAIN 2" MIN TEMPORARY CUTBACK PAVING PATCH ON ALL CLOSED TRENCHES UNTIL REPLACED BY FINAL PAVING.
14. REFER TO CITY OF PETALUMA STANDARD DETAIL 219 (TYP)

DETAIL 1

DATE: DECEMBER, 2020
 DESIGNED BY: DH
 DRAWN BY: MT
 CHECKED BY: KC

PROJECT NO.
 C66402143



CITY OF PETALUMA
 PUBLIC WORKS & UTILITIES
 202 N. McDowell Blvd., PETALUMA, CALIFORNIA, 94954
 PH. 707-778-4546 FAX. 707-778-4508



MCNEAR PARK WATER MAIN AND SEWER MAIN REPLACEMENTS
 DETAILS

SHEET
D1
 17 OF 18