



12W LED Wall light with movement sensor.

Working time-delay: 5s, 30s, 1Min,3 Min,5 Min, 8 Min.
Ambient light : Distance: 8m

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads






Dimensions




Physical Specification

Item Group	14 Wall & Ceiling LED
Family	Outdoor Wall Lights
Order Code	67492P/AN/W
Colour	Anthracite
Material	Plastic
Diffuser Material	PC
Shape	Rectangular
Length	170mm
Width	140mm
Height	170mm
Surface Wall	Yes
Indoor	Yes

Outdoor	Yes
Electrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	
Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	38V
Power(Watts)	11,6W
IP Rating	IP54
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	6-12W
Power Factor	0,5
Constant Current	Yes
300mA	20-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Eaglerise


Illumination Data

Colour Temperature	3000K
Lumen Output	600lm
Light Efficiency	50lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	0,833Kg
Pcs/Carton	12
Barcode	5291889066187
HS Code	9405104090

Energy Label

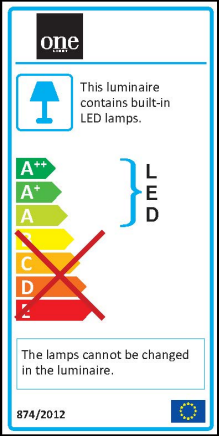

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes