



LED street light with COB LED. High lumen output ideal for replacement of old HPS and mercury street lighting fittings.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

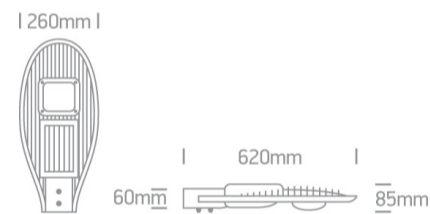

Physical Specification

Item Group	21 Industrial & Floodlights
Family	The COB LED Street Light 20-80W
Order Code	70101/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	260mm
Width	620mm
Height	85mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

80W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

Cable Length

60cm

F Mark



Fitting

Input Type

Constant Current

Input Current

2300mA

Voltage

34V

Power(Watts)

78,8W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz


Yes

60 Hz


Yes

Power(Watts)

43,5-58,5W

Power Factor	0,9
Constant Current	Yes
Output	2300mA
Voltage Range	29-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	SELF


Illumination Data

Colour Temperature	4000K
Lumen Output	6000lm
Light Efficiency	75lm/W
CRI	70
Beam Angle	120° x 60°
Illumination Diagram	

Packing Info

Box Weight	4,4Kg
Pcs/Carton	2
Barcode	5291889041429
HS Code	9405409900

Energy Label

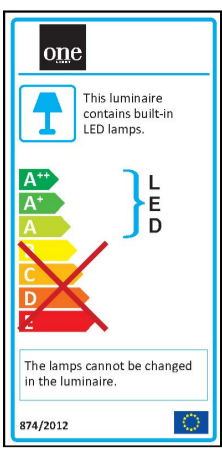

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes