



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The LED Park Light Die cast
Order Code	70104/G/C
Colour	Grey
Material	Die Cast
Shape	Circular
Height	605mm
Diameter	450mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	950mA
Voltage	30V
Power(Watts)	28,5W
IP Rating	IP65
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux

Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25,6-34W
Power Factor	0,9

Constant Current
950mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Yes
27-36V
IP20

No
Plastic
Connector
Meanwell

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


4000K
2700lm
90lm/W
70
120°


Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

12,5Kg
1
5291889035572
9405409900

Energy Label

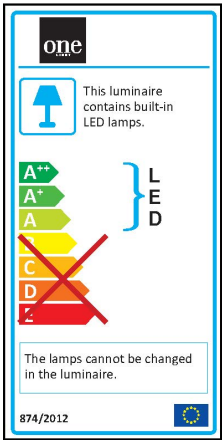

Warranty

5 Years

Weee Directive

Yes