



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The LED Park Lantern Die cast
Order Code	70105/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Circular
Height	511mm
Diameter	460mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

50W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1700mA

Voltage

29V

Power(Watts)

49W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz


Yes

Power(Watts)


46-61,2W

Power Factor

0,9

Constant Current	Yes
1700mA	27-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell


Illumination Data

Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	80lm/W
CRI	70
Beam Angle	60°
Illumination Diagram	

Packing Info

Box Weight	10,4Kg
Pcs/Carton	1
Barcode	5291889047469
HS Code	9405409900

Energy Label

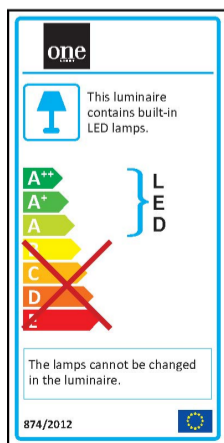

Warranty

5 Years

Weee Directive

Yes
