



30W Classic LED floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

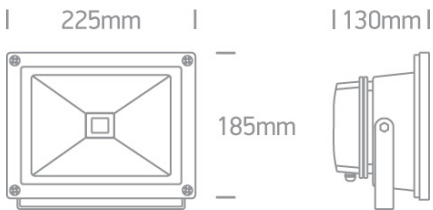

Accessories



7028BP/G

Physical Specification		
Item Group	21 Industrial & Floodlights	
Family	The Classic LED Floodlights Die cast	
Order Code	7028B/G/W	
Colour	Grey	
Material	Die Cast	
Shape	Rectangular	

Length	225mm
Width	130mm
Height	185mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	900mA
Voltage	30V
Power(Watts)	27W
IP Rating	IP65
Light Source	LED built in
LED Type	COB

LED Brand	Epistar
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	16-32W
Power Factor	0,9
Constant Current	Yes
900mA	18-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector


Illumination Data

Colour Temperature	3000K
Lumen Output	2150lm
Light Efficiency	71,67lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	2,5Kg
Pcs/Carton	30
Barcode	5291889027096
HS Code	9405409900

Energy Label

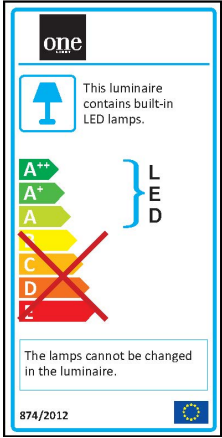

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes