



150W Classic LED floodlight, IP65.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

| | |
|-------------------|--------------------------------------|
| Item Group | 21 Industrial & Floodlights |
| Family | The Classic LED Floodlights Die cast |
| Order Code | 7032/AN/C |
| Colour | Anthracite |
| Material | Die Cast |
| Diffuser Material | Glass |
| Shape | Rectangular |
| Length | 450mm |
| Width | 260mm |
| Height | 185mm |
| Surface Ceiling | Yes |
| Surface Wall | Yes |

Surface Floor/Ground

Yes

Outdoor

Yes

Adjustable

1 Direction

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

150W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

4500mA

Voltage

33V

Power(Watts)

148,5W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

Gear

Gear Type

Led Driver

Input Voltage

100-240V

| | |
|------------------|---|
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 121,5-162W |
| Power Factor | 0,95 |
| Constant Current | Yes |
| Output | 4500mA |
| Voltage Range | 27-36V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Connector |
| Brand | Meanwell |


Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 4000K |
| Lumen Output | 12000lm |
| Light Efficiency | 80lm/W |
| CRI | 70 |
| Beam Angle | 120° |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Box Weight | 8,6Kg |
| Pcs/Carton | 1 |
| Barcode | 5291889032731 |
| HS Code | 9405409900 |

Energy Label

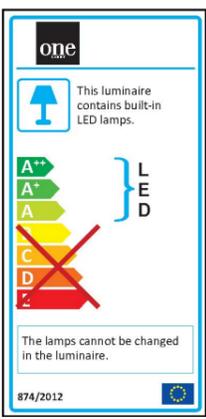

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes