



10W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	
Family	
Order Code	
Colour	
Material	
Diffuser Material	
Shape	
Length	
Width	
Height	
Surface Ceiling	
Surface Wall	

21 Industrial & Floodlights
The Slim Line LED Floodlights Die cast
7038/G/W
Grey
Die Cast
Glass
Rectangular
175mm
170mm
90mm
Yes
Yes

Surface Floor/Ground
Outdoor
Adjustable

Yes
Yes
1 Direction

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
Cable Length
F Mark

Built In
100-240V
Yes
Yes

10W
IP65
LED built in
No
100cm


Fitting
Input Type
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand

Constant Current
10W
IP65
LED built in
COB
Epistar

Gear
Gear Type
Input Voltage
50 Hz

Led Driver
100-240V
Yes

60 Hz
Power(Watts)
Power Factor
Constant Current
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal

Yes
10W
0,9
Yes
IP20

No
Plastic
Connector

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
700lm
70lm/W
70
120°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

18cm
8cm
20cm
1Kg
10
5291889032205
9405409900

Energy Label

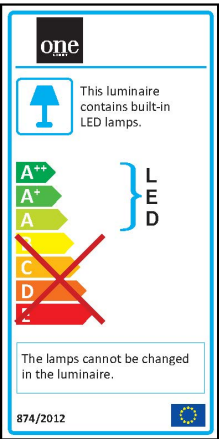

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes