



10W COB LED design floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

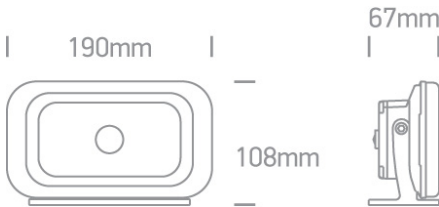

Gallery



Physical Specification

Item Group	21 Industrial & Floodlights		
Family	The COB LED Design Floodlights Die cast + plastic		
Order Code	7064/W/C		
Colour	White		
Material	Die Cast		
Shape	Rectangular		
Length	190mm		

Width	108mm
Height	67mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	100cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	320mA
Power(Watts)	10W
IP Rating	IP65
Light Source	LED built in
LED Type	COB

LED Brand	Bridgelux
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	10W
Power Factor	0,9
Constant Current	Yes
Output	330mA
Voltage Range	30V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector

Illumination Data


Colour Temperature	4000K
Lumen Output	1135lm
Light Efficiency	113,5lm/W
CRI	70
Beam Angle	100°
Illumination Diagram	

Packing Info

Box Length	13,7cm
Box Width	11,3cm
Box Height	25cm

Box Weight	1Kg
Pcs/Carton	8
Barcode	5291889045953
HS Code	9405409900

Energy Label

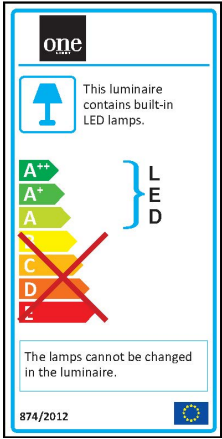

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes