



30W COB LED design floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




## Downloads



## Dimensions

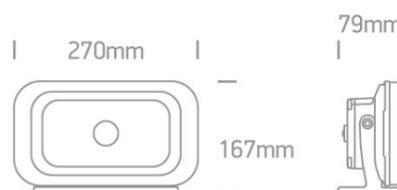

## Gallery



## Physical Specification

Item Group

21 Industrial & Floodlights

Family

The COB LED Design Floodlights Die cast + plastic

Order Code

7066/W/C

Colour

White

Material

Die Cast

Shape

Rectangular

Length

270mm

Width	128mm
Height	79mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	1 Direction

## Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	100cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1050mA
Voltage	25
Power(Watts)	27,5W
IP Rating	IP65
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

30W

Power Factor

0,9

Constant Current

Yes

1050mA

25V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Connector

## Illumination Data

Colour Temperature

4000K

Lumen Output

3030lm

Light Efficiency

101lm/W

CRI

70

Beam Angle

100°

Illumination Diagram



## Packing Info

Box Length

20cm

Box Width

12,8cm

Box Height

29,3cm

Box Weight

2Kg

Pcs/Carton

4


Barcode

5291889045960

HS Code

9405409900

## Energy Label

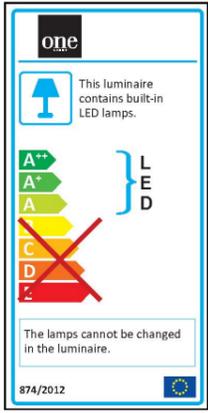

## Certification & Warranty

Warranty

3 Years

Weee Directive

Yes