elights

Flexible LED light strip, with SMD2216 LEDs, 70LEDs/meter, 4,8W/meter.Supplied in 5 meters roll with white PCB and double adhesive tape for a better fixing.

Can be cut every 10cm (7-LED segment).

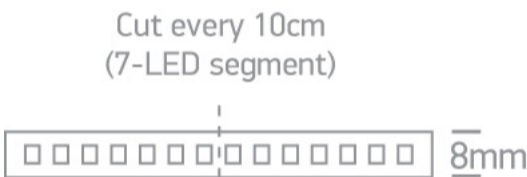Requires 24V DC constant voltage LED driver.

Complies with standard EN60598-1 and any other specific standards.

IP20   90 CRI   DIMMABLE   CE
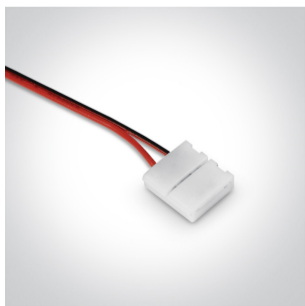
Downloads

IES

Dimensions

Cut every 10cm
(7-LED segment)

8mm

Gallery

Accessories

7822

7824

Related items

20030

Physical Specification

Item Group	08 Strips & Profiles
Family	The 4,8W/m Indoor 24V
Order Code	7820/EW
Shape	Rectangular
Length	5000mm
Width	8mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	◇III◇
Power(Watts)	4,8W/m
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2216
LED Brand	Refond
LED Number	70LEDs/m

Illumination Data

Colour Temperature	2700K
Lumen Output	384lm/m
Light Efficiency	80lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Length	24cm
Box Width	21,5cm
Box Height	2cm
Box Weight	0,17kg
Pcs/Carton	40
Barcode	5291889038641
HS Code	9405409989

Energy Label

ENERG
ONE Light Ltd
7820/EW

A
B
C
D
E
F
G

F

4
kWh/1000h

2019/2015

Energy Class	F

Certification & Warranty

Warranty	5 Years
Weee Directive	Yes