



Bristol Street Improvements Development/Construction Overview

December 2023



Slide 1

Bristol Street Improvements
Public Works Agency
December 2023

Completed Widening Projects

- St. Andrew Place to McFadden Avenue: Completed in 2002
- Elm Street to Memory Lane: Completed in 2002
- Pine Street to 3rd Street: Completed in 2010
- McFadden Avenue to Pine Street: Completed in 2011
- Bristol/Warner Intersection: Completed in 2012
- Bristol/17th Intersection: Completed in 2013
- 3rd Street to Civic Center Drive: Completed in 2014
- Washington Avenue to 17th Street: Completed in 2019



Upcoming Bristol Projects


Civic Center Drive to Washington Street

- Construction Schedule – 2nd Quarter 2024 to 4th Quarter 2025*

Warner Avenue to St. Andrew Place

- Construction Schedule – 4th Quarter 2024 to 2nd Quarter 2026*

*Schedule is dependent on South California Edison undergrounding coordination

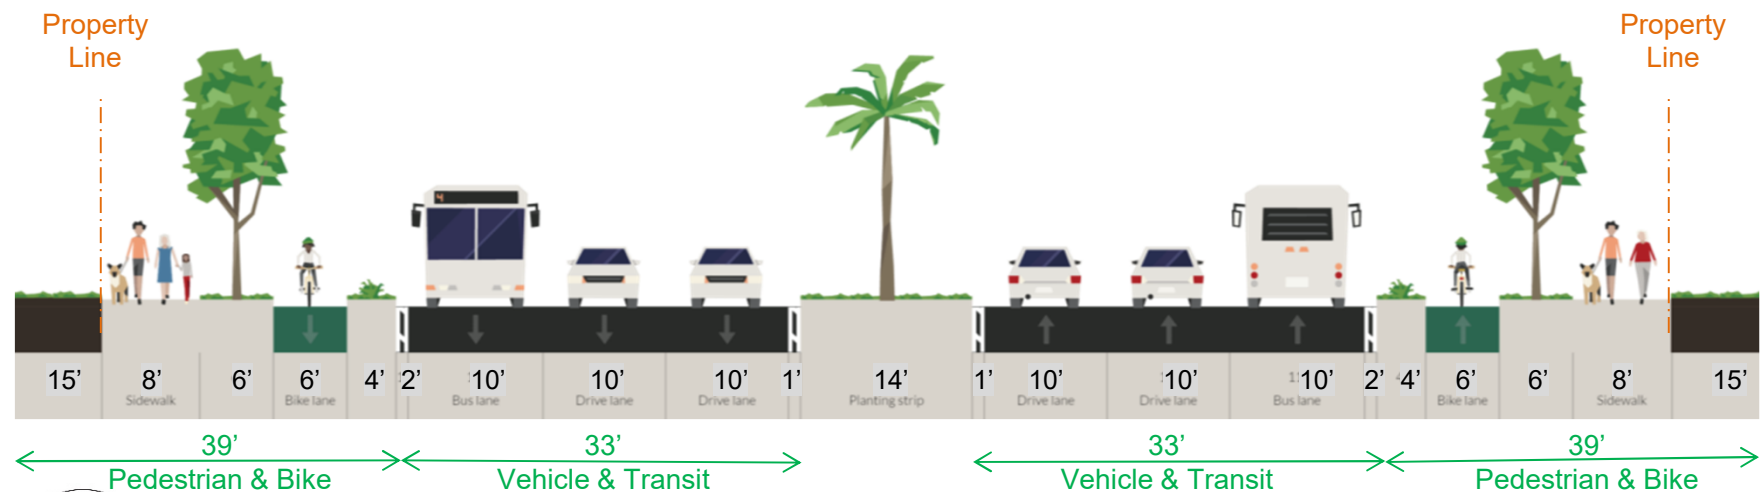

Slide 3

Bristol Street Improvements
Public Works Agency
December 2023

Street Improvements

Civic Center to Washington & Warner to St. Andrew

- Project includes one additional through lane and a buffered bike lane for both northbound and southbound traffic
- Infrastructure and safety improvements include new pavement, raised medians, raised buffers for bike lanes, traffic signal improvements, water improvements, and street lighting
- Aesthetic improvements include irrigation and landscaping enhancements in the raised medians and raised buffers as well as sound wall installation



Bristol Utility Undergrounding

Civic Center to Washington

- Utility undergrounding performed by utilities
- Trench #1: Telecommunication Companies
 - Crown Castle, Verizon, and Charter are current tenants on poles
 - Infrastructure will be relocated underground
 - Permit is ready for issuance, will be pulled closer to start of construction
 - Construction to begin in January 2024
- Trench #2: Southern California Edison (SCE)
 - Power poles will be removed
 - Infrastructure will be relocated underground
 - Construction will follow telecommunication work
 - Currently, SCE permit is pending approval
 - On 12/04/2023, SCE was notified to pickup redlines for resubmittal
- Community will be notified when construction begins



Bristol Utility Undergrounding

Warner to St. Andrew

- Utility undergrounding performed by City's contractor
- Single Trench: Southern California Edison (SCE) & Telecommunication Companies
 - Power poles will be removed
 - Crown Castle, Verizon, AT&T, Teleport Communications America, and Charter are current tenants on poles
 - Infrastructure will be relocated underground
- SCE and Telecommunication companies are working with City to finalize their plans. Plans are currently at 90%.
- Community will be notified when construction begins



What's Next?

Civic Center to Washington

- Utility undergrounding starting in early 2024
- Construction award for City's improvements anticipated by the 2nd Quarter of 2024 and work will start following substantial completion of undergrounding work
- Community will be notified when construction will begin
- First items of work will be construction of sound walls and work in TCE areas



What's Next?

Warner to St. Andrew

- Wrap up temporary construction easements and easement for utility relocation
- Utility undergrounding anticipated to start in late 2024 as part of the City's improvements by City's contractor
- Community will be notified when construction will begin
- First items of work will be construction of sound walls and work in TCE areas





Thank you for your time!



Slide 9

Bristol Street Improvements
Public Works Agency
December 2023