


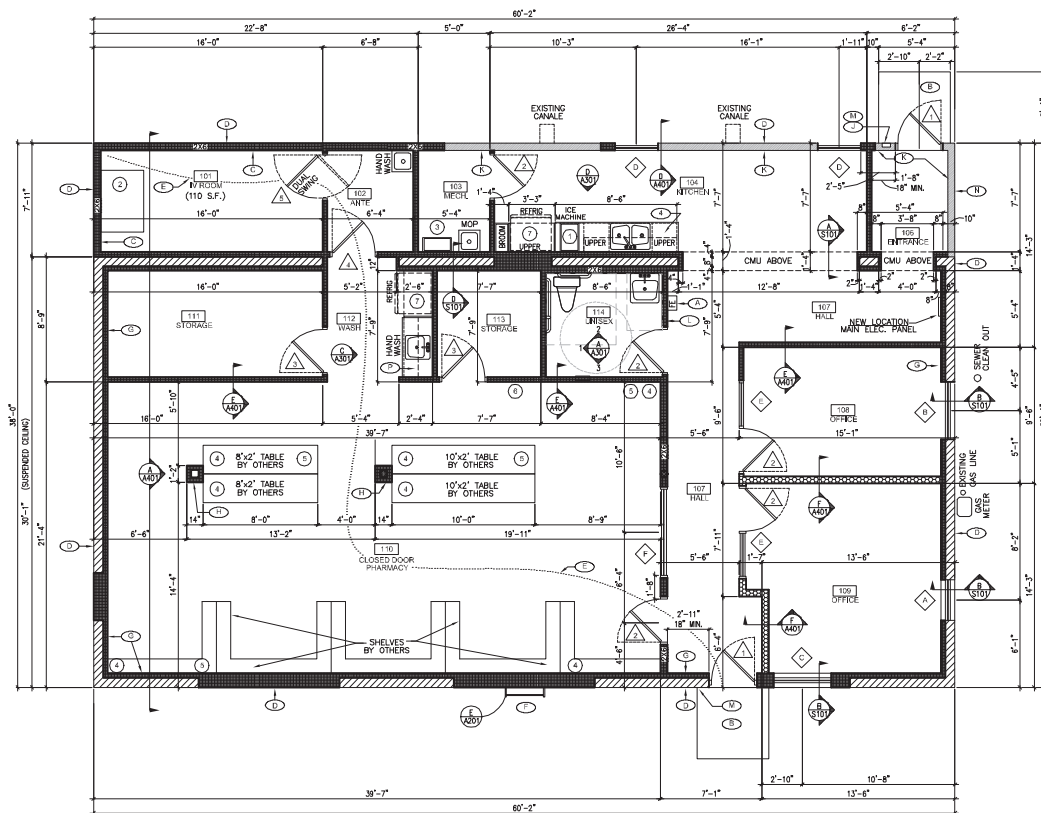

IMPROVEMENT FLOOR PLAN

1/4"=1'-0"

GENERAL NOTES:

- OPENINGS ON EAST WALL:
PER IBC 705.8 MAX ALLOWABLE OPENINGS BASED ON
6' FIRE SEPARATION DISTANCE = 10%
10% X 503.5 SF = 50 SF ALLOWABLE OPENINGS
33 SF OPENINGS PROVIDED = COMPLIES

EQUIPMENT LIST:

- ICE MAKER:
HOSHIZAKI COUNTERTOP UNIT
MODEL DOM-270BML, ICE MAKER, AIR-COOLED,
ICE AND WATER DISPENSER
- HORIZONTAL LAMINAR FLOW WORKBENCH WITH
EPOXY POWDER COATED STEEL STAND
PRODUCT CODE: 1000-11-B
52"Wx36"Dx62.25"H
- TANKLESS, GAS, WALL MOUNT WATER HEATER
W/ RECIRCULATING PUMP
RE: PLUMBING PLAN
- COMPUTER W/ DUAL MONITORS
- HEAT PRESS:
"THE MAKER" 11"x18"
CATALOG # MA-MAXX-11
- PRINT / COPY / SCAN MACHINE
"XEROX" WORK CENTRE
5325 / 5330 / 5335
- 36" REFRIGERATOR
MODEL TO BE DETERMINED

PROPOSED KEYED NOTES:

- 2A10BC FIRE EXTINGUISHER
- 5'X5' CONC. LANDING FLUSH W/ FIN. FLR.
- NEW WALLS 10'-6"x4'-0" HIGH 2X6 SPF#2 @ 16" O.C.
W/R-21 BATT. INSULATION
RE: ROOM FINISH SCHEDULE - SHEET A401
- RE-STUCCO ENTIRE EXTERIOR
- COMMON PATH OF EGRESS TRAVEL
71'-0"x100' COMPLIES
- OPTIONAL ROOF LADDER. LOCATION TO BE DETERMINED
RE: E4001
- 2x4 SPF#2 @ 24" O.C. FRAMED WALL W/
R-13 BATT. INSULATION & 5/8" CYP. BS.
- 2X4 FRAMED ELECTRICAL CHASE (9'-1")
- KNOX-BOX, 3200 SERIES, HINGED DOOR
MODEL (7"Wx7'Hx3"D)
- FINISH EXISTING 2X6 WALL
RE: ROOM FINISH SCHEDULE - SHEET A401
- WALL MOUNT ADA RESTROOM SIGN W/ BRAILLE
RE: B/A401
- 2'x2' WALL MOUNTED SIGN. BOTT. @ 60" A.F.F.
- 1 HOUR RATED WALL - SEE ESR REPORT # 2428
THRO ASSEMBLY
- 34" HIGH COUNTER, BASE CABINET & UPPERS.
(ADA - SIDE APPROACH)
- 34" HIGH COUNTER, BASE CABINET & UPPERS.
(ADA - FRONT APPROACH)

WALL LEGEND:

-

SYMBOL LEGEND:

- KEYED NOTE
- WINDOW MARKER / LABEL
RE: SHEET A102 & A401
- DOOR MARKER / LABEL
RE: SHEET A102 & A401
- ROOM NUMBER
RE: SHEETS A102 & A401
- SECTION / ELEVATION MARKER
- EQUIPMENT MARKER / LOCATION
RE: SHEET A102 & A401