


BREAKROOM ROOM MILLWORK FURNISHED BY OWNER AND INSTALLED BY CONTRACTOR. CONTRACTOR TO INSTALL AND MAKE PLUMBING CONNECTIONS. ALTERNATE 1 IS TO SELF PERFORM MILLWORK AND ALL OTHER MILLWORK SEE SHEETS A3.2 AND A3.3 FOR DETAILS

TREATMENT ROOM MILLWORK FURNISHED BY OWNER AND INSTALLED BY CONTRACTOR. ALTERNATE 1 IS TO SELF PERFORM MILLWORK AND ALL OTHER MILLWORK SEE SHEETS A3.2 AND A3.3 FOR DETAILS

RECEPTION DESK FURNISHED BY OWNER AND INSTALLED BY CONTRACTOR. CONTRACTOR TO RUN POWER TO DESK. ALTERNATE 1 IS TO SELF PERFORM DESK AND ALL OTHER MILLWORK SEE SHEETS A3.2 AND A3.3 FOR DETAILS

1 CONSTRUCTION PLAN - OPTION 1
SCALE: 1/4" = 1'-0"

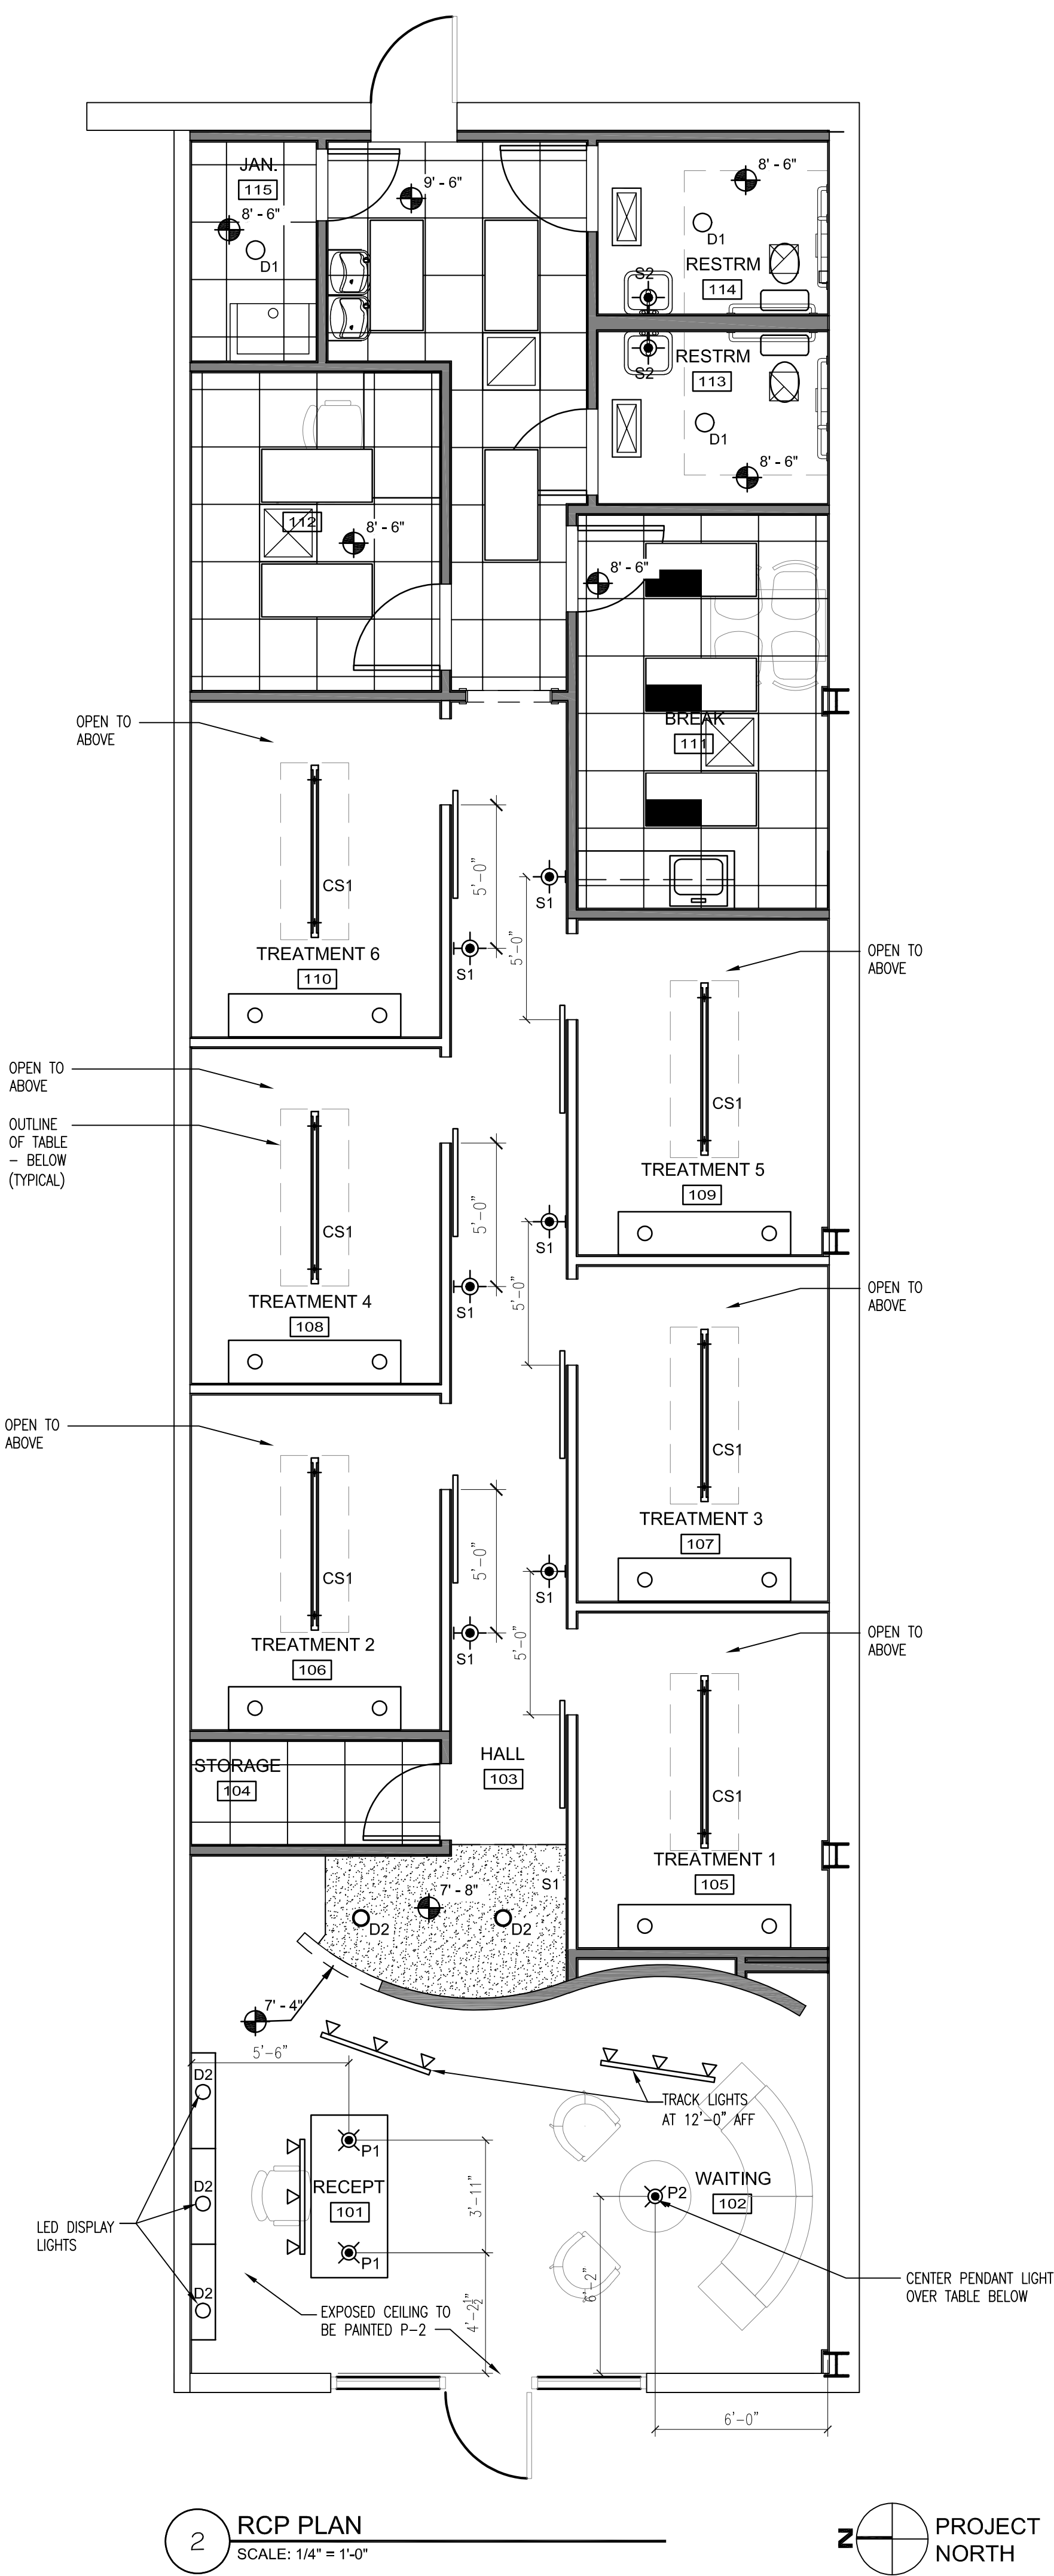

2 RCP PLAN
SCALE: 1/4" = 1'-0"



CONSTRUCTION NOTES

- A. PROVIDE 5/8" PLYWOOD BLOCKING IN AREAS WHERE THERE IS WALL MOUNTED SHELVING OR EQUIPMENT. PLACE OVER LARGE AREAS, FROM 4'-0" A.F.F. TO 8'-0" A.F.F. (AT LEAST), AS LOCATIONS OF ITEMS CAN CHANGE DURING CONSTRUCTION. NO EXTRA FEES SHALL BE ENTERTAINED FOR A LACK OF COORDINATION.
- B. VERIFY EXACT SIZE AND LOCATION OF ALL EQUIPMENT WITH EQUIPMENT SUPPLIER AND OWNER.
- C. GENERAL CONTRACTOR TO VERIFY WITH EQUIPMENT SUPPLIER ALL MECHANICAL AND ELECTRICAL REQUIREMENTS.
- D. GENERAL CONTRACTOR TO COORDINATE WORK AND PROVIDE FINAL MECHANICAL AND ELECTRICAL HOOK-UPS TO ALL EQUIPMENT AS REQUIRED.
- E. MILLWORK CONTRACTOR TO PROVIDE ARCHITECT WITH FULL SET OF SHOP DRAWINGS FOR FINAL APPROVAL.

DOOR TYPE

CONSTRUCTION LEGEND

	EXISTING PARTITION / WALL TO REMAIN
P1	TYPICAL NEW WALL CONSTRUCTION. 3-5/8" MTL STUD FRAMING w/ 5/8" GYP BOARD ON EACH SIDE. PARTITION TO EXTEND 4"-6" ABOVE SPECIFIED CEILING HEIGHT. PROVIDE SOUND ATTENUATION.
P2	NEW CONSTRUCTION WALL. 3-5/8" MTL STUD FRAMING w/ 5/8" GYP BD ON BOTH SIDES. PARTITION HEIGHT TO DECK. 1X5 PAINTED WD WITH 1/2" SPACE UP TO 11'-6".
P3	NEW CONSTRUCTION WALL. 3-5/8" MTL STUD FRAMING w/ 5/8" GYP BD ON EACH SIDE. PARTITION HEIGHT 9'-0"
P4	NEW CONSTRUCTION WALL. 6" MTL STUD FRAMING w/ 5/8" GYP BD ON EACH SIDE. PARTITION HEIGHT TO DECK.
P5	NEW CONSTRUCTION WALL. 3-5/8" MTL STUD FRAMING TO DECK w/ 5/8" GYP BD ON OPEN CEILING SIDE AND VERIFY CEILING ON OPPOSITE SIDE.
P6	NEW CURVED CONSTRUCTION WALL. 3-5/8" MTL STUD FRAMING TO 6" BELOW EXISTING STRUCTURE w/ 5/8" GYP BD ON VISIBLE SIDES AND TO CEILING HEIGHT OF OPPOSITE SIDE
P7	EXIST DEMISING WALL - GC VERIFY RATING

CEILING SYMBOL LEGEND

CEILING SYMBOL LEGEND:

- 2X4 FLOURESCENT FIXTURE.
- 2X2 FLOURESCENT FIXTURE.
- P1 PENDANT LIGHT - TYPE 1: MODEL: 28087-2C-BS JAPANESE LANTERN GLASS PENDANT
- P2 PENDANT LIGHT - TYPE 2: CERCHIO LIGHTING - DOJO 055.011.XX FINISH: WHITE-SILVER LEAF
- S1 WALL SCONCE: MODEL 20415-ALB
- S2 WALL SCONCE: BATHROOM MODEL: ACCESS LIGHTING-62052LED OXYGEN
- D1 6" RECESSED LED DOWNLIGHT
- D2 4" RECESSED LED DOWNLIGHT
- TRACK LIGHTING
- 6'-0" CABLE SUSPENDED FIXTURE : MANUF: LUMIUM MODEL: O3.1-CSLAI-6'-35K-VHC-UNV-10D-SC-MF-55-SW-W-6
- EXIT FIXTURE WITH EMERGENCY. SHADED QUADRANT INDICATES TEXT SIDE. ARROW INDICATES DIRECTION OF EGRESS.
- BATH FAN
- RETURN DIFFUSER
- SUPPLY DIFFUSER
- GYP. BOARD SOFFIT
- X' = X" CEILING HEIGHT ABOVE FINISH FLOOR



ROBERT E. WALKER
ARCHITECT
2229 FIRST AVE. SOUTH
Suite
BIRMINGHAM, ALABAMA
35233
T-205.254.3212
F-205.254.3269



REV	DATE

LA BIKINI
BLUEBONNETT SQUARE
7770 Bluebonnett Blvd
Suite - E
Baton Rouge, Louisiana 70808

SKEMATIC OPTIONS

TENANT IMPROVEMENTS

PROJECT NO.: 8078.05
ISSUED: 02/22/21
PLANS, RCP, NOTES AND EQUIPMENT