




06 Downlights Fixed LED>The 3-12W Round Recessed Panels Die cast

10103FA/W/D

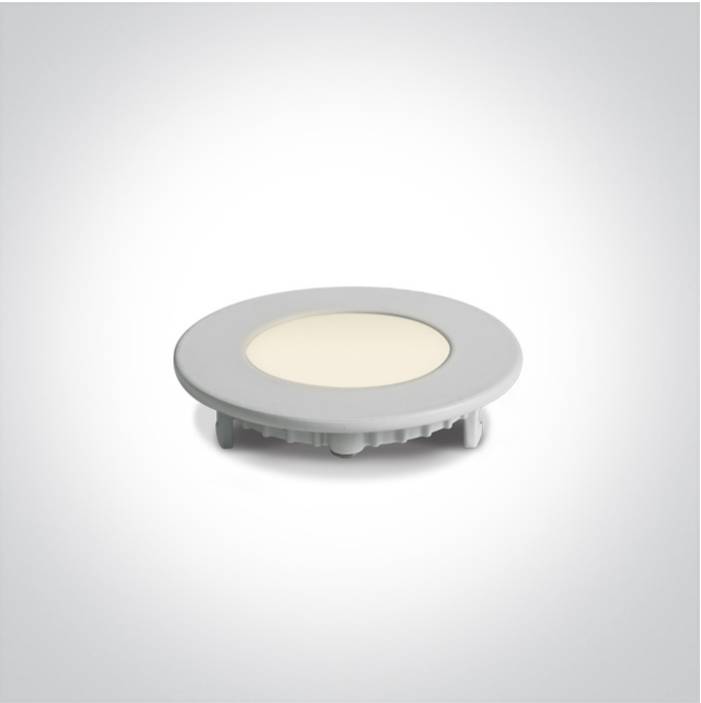

3W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 300mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

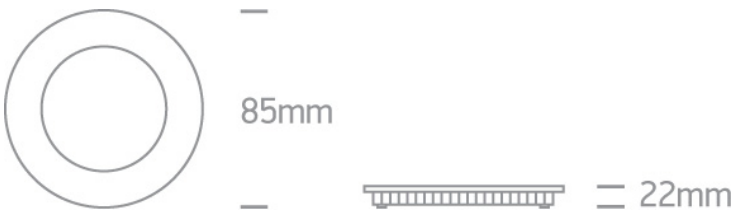

Gallery



Physical Specification

Item Group	06 Downlights Fixed LED
Family	The 3-12W Round Recessed Panels Die cast
Order Code	10103FA/W/D
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular

Height	22mm
Diameter	85mm
Cutout Hole Diameter	70mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	3W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	9V
Safety Class	
Power(Watts)	2,7W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2835

LED Brand
LED Number

Epistar
15

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
300mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Brand

Led Driver
220-240V
Yes
Yes
2,4-3,6W
0,6
Yes
8-12V DC
IP20

No
50°C
75°C
Plastic
Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

6000K
210lm
70lm/W
80
120°



Packing Info

Box Length

14,2cm

Box Width	3,1cm
Box Height	4cm
Box Weight	0,170Kg
Pcs/Carton	60
Barcode	5291889042723
HS Code	9405109890

Energy Label

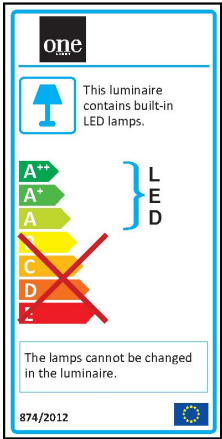

Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes