


10105K/G/C





## Dimensions




100mm

Diameter	123mm
Cutout Hole Diameter	107mm
Recessed Ceiling	Yes
Depth Required	130mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	5W
IP Rating	IP53
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	

Fitting	
Input Type	Constant Current
Input Current	120mA
Voltage	40V
Safety Class	
Power(Watts)	4,2W
IP Rating	IP53
Light Source	LED built in
LED Brand	GH

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4,2-5W

Power Factor

0,8

Constant Current

Yes

Output

120mA

Voltage Range

35-42V

IP Rating

IP20

Safety Class



Ambient Temp

40°C

Operating Temp

80°C

Housing Material

Plastic

Output Terminal

Cable

Illumination Data

Colour Temperature

4000K

Lumen Output

410lm

Light Efficiency

82lm/W

CRI

80

Beam Angle

100°

Illumination Diagram



Packing Info

Box Length


13,5cm

Box Width

13cm

Box Height	11,5cm
Box Weight	0,450kg
Pcs/Carton	24
Barcode	5291889028116
HS Code	9405409900

Energy Label

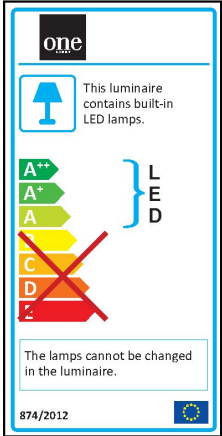

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes