


10105K/W/C



Complies with standard EN60598-1 and any other specific standards.



Dimensions

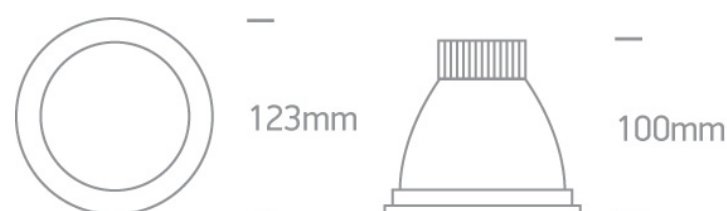




The image displays three views of the LED 100mm round downlight. The left view shows the side profile of the light, highlighting its slim design and the heat sink on the back. The middle view shows the top of the light, featuring a black mounting bracket with a central screw and a black cable. The right view shows the front of the light, which has a white trim ring and a clear lens.

100mm

Diameter	123mm
Cutout Hole Diameter	107mm
Recessed Ceiling	Yes
Depth Required	130mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	5W
IP Rating	IP53
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	

Fitting	
Input Type	Constant Current
Input Current	120mA
Voltage	40V
Safety Class	
Power(Watts)	4,2W
IP Rating	IP53
Light Source	LED built in
LED Brand	GH

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4,2-5W

Power Factor

0,8

Constant Current

Yes

Output

120mA

Voltage Range

35-42V

IP Rating

IP20

Safety Class



Ambient Temp

40°C

Operating Temp

80°C

Housing Material

Plastic

Output Terminal

Cable

Illumination Data

Colour Temperature

4000K

Lumen Output

410lm

Light Efficiency

82lm/W

CRI

80

Beam Angle

100°

Illumination Diagram



Packing Info

Box Length


13,5cm

Box Width

13cm

Box Height	11,5cm
Box Weight	0,450kg
Pcs/Carton	24
Barcode	5291889028093
HS Code	9405409900

Energy Label

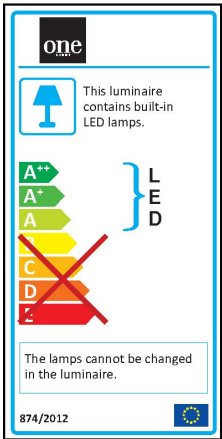

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes