


10105W/AL/W



Complies with standard EN60598-1 and any other specific standards.



## Dimensions



## 02 Recessed Spots Fixed LED

## The COB Bathroom IP44 Range Aluminium

10105W/AL/W

Aluminium



Aluminium


Acrylic

Circular

Height	70mm
Diameter	74mm
Cutout Hole Diameter	57mm
Recessed Ceiling	Yes
Depth Required	90mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	5W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Safety Class	
Power(Watts)	4,5W
IP Rating	IP44
Light Source	LED built in
LED Type	COB
LED Brand	Cree

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4-8W

Power Factor

0,8

Constant Current

Yes

500mA

8-16V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

75°C

Housing Material

Plastic

Output Terminal

Connector

Brand

Eaglerise

Protection

Short Circuit / Overheat Protection

Illumination Data

Colour Temperature

3000K

Lumen Output

425lm

Light Efficiency

85lm/W

CRI

80

Beam Angle

30°


Illumination Diagram



Packing Info

Box Weight	0,25kg
Pcs/Carton	30
Barcode	5291889036371
HS Code	9405409900

Energy Label

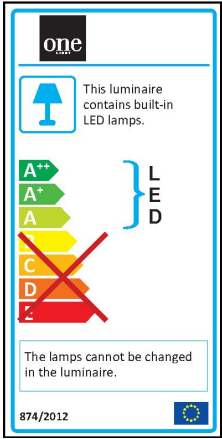

Certification & Warranty

Warranty	2 Years
Average Lifetime	50000hrs
Weee Directive	Yes