

10110K/W/W




Complete with 250mA dimmable driver.

standards.



Dimensions

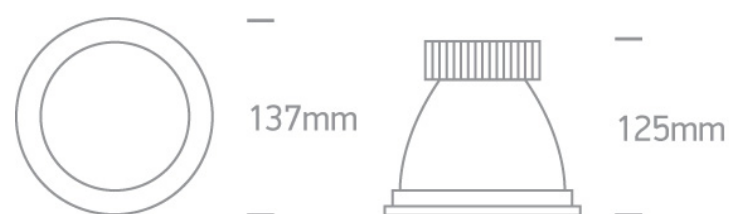

The image displays three views of the LED spot light:

- Left View:** A side profile of the light fixture, showing its circular shape and the mounting bracket on the side.
- Middle View:** A top-down view of the light fixture, highlighting the heat sink and the mounting bracket.
- Right View:** A front view of the light fixture, showing the circular lens and the mounting bracket.

06 Downlights Fixed LED

The COB Project Round Range

10110K/W/W

White



Die Cast


Circular

125mm

Diameter	137mm
Cutout Hole Diameter	122mm
Recessed Ceiling	Yes
Depth Required	150mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP53
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	

Fitting	
Input Type	Constant Current
Input Current	250mA
Voltage	36V
Safety Class	
Power(Watts)	9W
IP Rating	IP53
Light Source	LED built in
LED Brand	GH

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

8,75-10,5W

Power Factor

0,9

Constant Current

Yes

250mA

35-42V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

40°C

Operating Temp

80°C

Housing Material

Plastic

Output Terminal

Cable

Illumination Data

Colour Temperature

3000K

Lumen Output

600lm

Light Efficiency

60lm/W

CRI

80

Beam Angle

100°

Illumination Diagram



Packing Info

Box Length


14,5cm

Box Width

14,5cm

Box Height	13,5cm
Box Weight	0,64kg
Pcs/Carton	24
Barcode	5291889028123
HS Code	9405409900

Energy Label

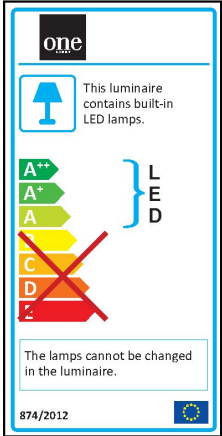

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes