


02 Recessed Spots Fixed LED>The Trimless Mini Range Aluminium

10112BTR/B/W

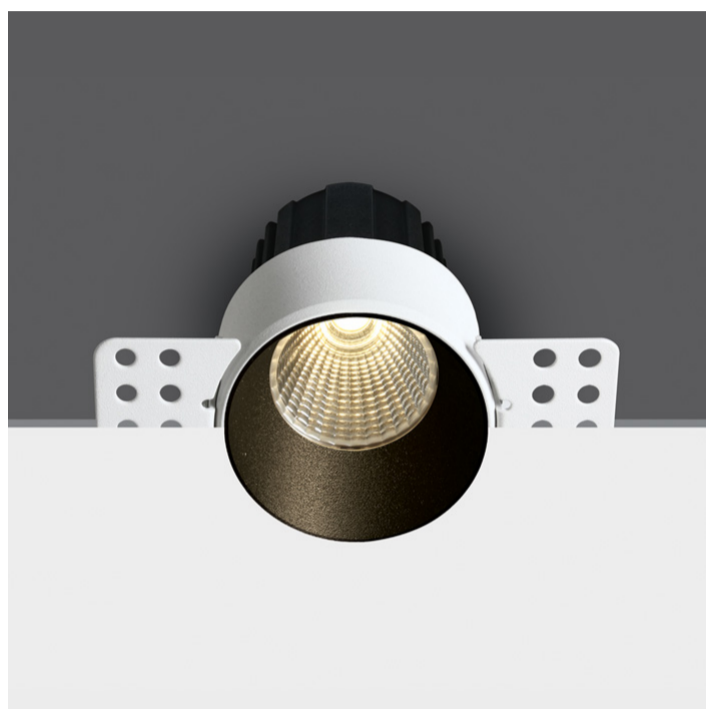

9W/12W COB LED 2-Step trimless Recessed spot, IP20, for general application. Requires 500mA/700mA constant current driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Must be ordered separately



89015A

## Related items



89015AT

## Physical Specification


Item Group	02 Recessed Spots Fixed LED
Family	The Trimless Mini Range Aluminium
Order Code	10112BTR/B/W
Colour	Black
Material	Aluminium
Shape	Circular
Height	92mm
Diameter	64mm
Cutout Hole Diameter	70mm
Recessed trimless ceiling	Yes
Depth Required	110mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

### Fitting

Input Type	Constant Current
Input Current	500mA/700mA
Safety Class	III
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand
Cable Length
F Mark

Bridgelux
40cm


#### Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram
Dark Light

3000K
1100lm
91,67lm/W
90
40°

Yes

#### Packing Info

Pcs/Carton
Barcode
HS Code

48
5291889070061
9405409900

#### Certification & Warranty

Warranty
Weee Directive

5 Years
Yes