

06 Downlights Fixed LED>Dark Light Pro Range Aluminium

10112ED/W/B/W



12W COB LED recessed downlight, for general lighting applications.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions

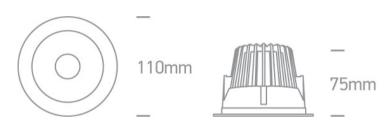

Physical Specification


Item Group	06 Downlights Fixed LED
Family	Dark Light Pro Range Aluminium
Order Code	10112ED/W/B/W
Colour	White-Black
Material	Aluminium
Shape	Circular
Height	75mm
Diameter	110mm
Cutout Hole Diameter	92mm
Recessed Ceiling	Yes
Depth Required	95mm
Indoor	Yes

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	34,5V
Safety Class	
Power(Watts)	10,3W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
LED Number	1
F Mark	F
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-12,6W
Power Factor	0,5
Constant Current	Yes
300mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	LIFUD
llumination Data	
Colour Temperature	3000K
Lumen Output	720lm
Light Efficiency	60lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	
Dark Light	Yes
Packing Info	
Box Length	13cm
Box Width	13cm
Box Height	9cm
Pcs/Carton	50
Barcode	5291889058656
HS Code	9405409900

Energy Label



Certification	& W	/arrantv

Warranty	2 Years
Weee Directive	Yes