

02 Recessed Spots Fixed LED>The 12W COB IP65 Range

10112P/MC/W



12W COB LED recessed spot, IP64, for general application.  
Suitable for bathroom installation.

Requires 700mA constant current driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

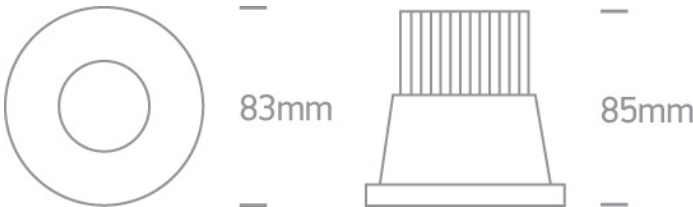

Gallery



Must be ordered separately



89015A

Related items




89015AT

Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The 12W COB IP65 Range
Order Code	10112P/MC/W
Colour	Brushed Chrome
Material	Die Cast
Shape	Circular
Height	85mm
Diameter	83mm
Cutout Hole Diameter	70mm
Recessed Ceiling	Yes
Depth Required	105mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics


Fitting	
Input Type	Constant Current
Input Current	700mA
Safety Class	
Power(Watts)	12W
IP Rating	IP64
Light Source	LED built in

LED Type
LED Brand
Cable Length
F Mark

COB
Bridgelux
40cm


Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram
Dark Light

3000K
1100lm
91,67lm/W
80
40°

Yes

Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

9cm
9cm
10cm
0,326kg
50
5291889034926
9405409900

Certification & Warranty

Warranty
Weee Directive

2 Years
Yes