

02 Recessed Spots Fixed LED>The COB IP54 Range

10113P/AL/W



15W COB LED recessed spot, IP54, for general lighting applications.

Suitable for bathroom installation.

Supplied with non-dimmable LED driver.

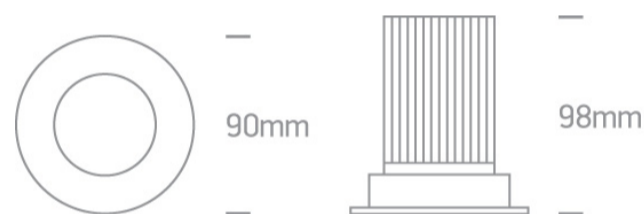
Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery






Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The COB IP54 Range
Order Code	10113P/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Circular
Height	98mm


Diameter	90mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	20,4V
Safety Class	
Power(Watts)	14W
IP Rating	IP54
Light Source	LED built in
LED Type	COB

LED Brand
LED Number
F Mark

Bridgelux
1


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
700mA
IP Rating
Safety Class
Dimmable
Housing Material
Brand
Protection

Led Driver
100-240V
Yes
Yes
10-19,5W
0,9
Yes
17-28V
IP20

No
Plastic
Eaglerise
0

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K
1000lm
66,67lm/W
80
50°

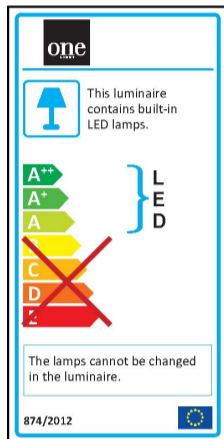

Packing Info

Box Length

16cm

Box Width	13,5cm
Box Height	9,5cm
Box Weight	0,294kg
Pcs/Carton	30
Barcode	5291889032687
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	3 Years
Weee Directive	Yes