



06 Downlights Fixed LED>The COB Downlight Range Aluminium

10120C/G/W



20W COB LED recessed downlight, IP20.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

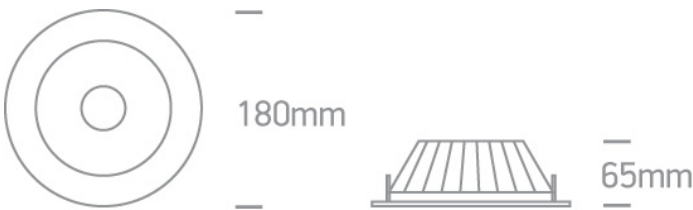

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Aluminium
Order Code	10120C/G/W
Colour	Grey
Material	Aluminium
Shape	Circular
Height	65mm
Diameter	180mm
Cutout Hole Diameter	160mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

20W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

38V

Safety Class



Power(Watts)

19W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
500mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Yes
Yes
13,5-21W
0,8
Yes
27-42V
IP20

No
Plastic
Cable
Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
1400lm
70lm/W
80
80°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

20cm
20cm
8cm
0,71kg
18
5291889040316
9405409900

Energy Label

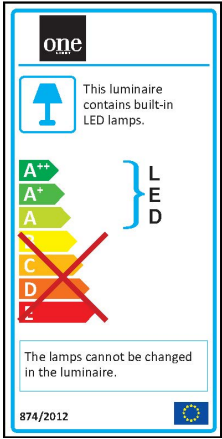

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes