

06 Downlights Fixed LED>The Chrome Bezel Range Aluminium

10124/G/C



24W SMD LED recessed downlight, chrome bezel range, IP44.

Complete with 600mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions

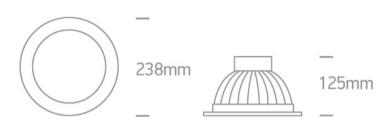

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Chrome Bezel Range Aluminium
Order Code	10124/G/C
Colour	Grey
Material	Aluminium
Shape	Circular
Height	125mm
Diameter	238mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	160mm
Indoor	Yes

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	24W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	600mA
Voltage	36V
Power(Watts)	21,6W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
LED Number	48
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	18-24W
Power Factor	0,9
Constant Current	Yes
600mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°
Operating Temp	80°
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu
Colour Temperature	4000K
Colour Temperature Lumen Output	4000K 1550lm
Lumen Output	1550lm
Lumen Output Light Efficiency	1550lm 64,58lm/W
Lumen Output Light Efficiency CRI	1550lm 64,58lm/W 80
Lumen Output Light Efficiency CRI Beam Angle	1550lm 64,58lm/W 80
Lumen Output Light Efficiency CRI Beam Angle	1550lm 64,58lm/W 80
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1550lm 64,58lm/W 80
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1550lm 64,58lm/W 80 120°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	1550lm 64,58lm/W 80 120°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	1550lm 64,58lm/W 80 120° 24,5cm
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height	1550lm 64,58lm/W 80 120° 24,5cm 24,5cm 12,5cm

Certification & Warranty	
Warranty	2 Years
Weee Directive	Yes