


06 Downlights Fixed LED>Dark Light Downlights Aluminium

10130A/AL/W

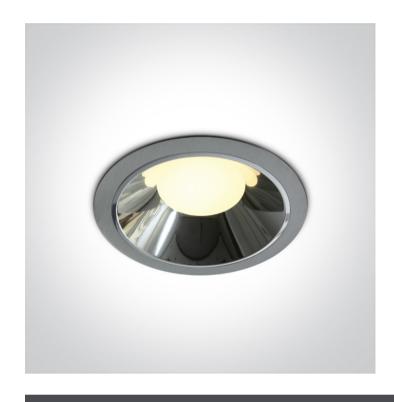

30W COB LED recessed downlight, IP20.

Complete with 350mA driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads







Dimensions

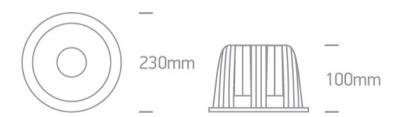

Physical Specification

Item Group	06 Downlights Fixed LED
Family	Dark Light Downlights Aluminium
Order Code	10130A/AL/W
Colour	Aluminium
Material	Aluminium
Shape	Circular
Height	100mm
Diameter	230mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	170mm
Indoor	Yes


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	84V
Safety Class	
Power(Watts)	29,4W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD
LED Brand	LG
LED Number	50
F Mark	F
Gear	
Gear Type	Led Driver

Input Voltage	100-240V	
50 Hz	Yes	
60 Hz	Yes	
Power(Watts)	20-30,1W	
Power Factor	0,9	
Constant Current	Yes	
350mA	57-86v	
IP Rating	IP20	
Safety Class		
Dimmable	No	
Ambient Temp	50°C	
Operating Temp	80°C	
Housing Material	Plastic	
	Cable	
Output Terminal		
Brand	Eaglerise	
Brand Iumination Data	Eaglerise	
Brand lumination Data Colour Temperature	Eaglerise 3000K	
Brand lumination Data Colour Temperature Lumen Output	Eaglerise 3000K 2300lm	
Brand lumination Data Colour Temperature Lumen Output Light Efficiency	3000K 2300Im 76,67Im/W	
Brand Lumination Data Colour Temperature Lumen Output Light Efficiency CRI	3000K 2300Im 76,67Im/W 80	
Brand lumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	3000K 2300lm 76,67lm/W 80	
Brand Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3000K 2300Im 76,67Im/W 80 80°	
Brand Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3000K 2300Im 76,67Im/W 80 80°	
Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	3000K 2300Im 76,67Im/W 80 80°	
Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	3000K 2300Im 76,67Im/W 80 80° Ves	
Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length	Eaglerise 3000K 2300lm 76,67lm/W 80 80° Yes	

Pcs/Carton	5
Barcode	5291889034209
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes