

06 Downlights Fixed LED>The COB Downlight Range Aluminium

10130CR/W/W



30W COB LED recessed downlight, IP20.

Complete with 850mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery






Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Aluminium
Order Code	10130CR/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	70mm

Diameter	230mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	850mA
Voltage	33V
Safety Class	
Power(Watts)	28W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

20,4-41,6W

Power Factor

0,9

Constant Current

Yes

850mA

24-49V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Illumination Data

Colour Temperature

3000K

Lumen Output

2200lm

Light Efficiency

73,33lm/W

CRI

90

Beam Angle

80°

Illumination Diagram



Packing Info

Box Length

26cm

Box Width


26cm

Box Height

9,5cm

Box Weight	1,22kg
Pcs/Carton	9
Barcode	5291889041191
HS Code	9405409900

Energy Label

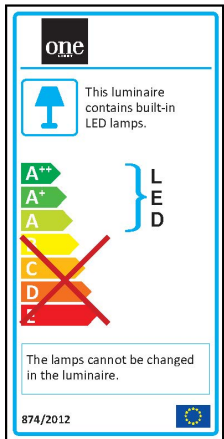

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes