



06 Downlights Fixed LED>The COB Downlight Range Aluminium

10130C/W/W



30W COB LED recessed downlight, IP20.

Complete with 850mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

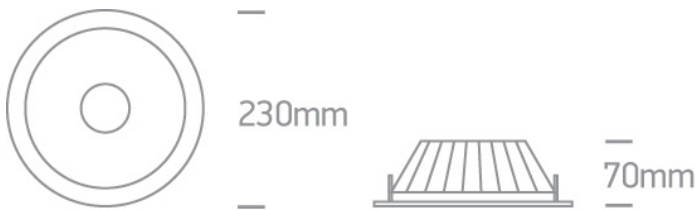

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Aluminium
Order Code	10130C/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	70mm
Diameter	230mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

850mA

Voltage

33V

Safety Class



Power(Watts)

28W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

F Mark



Gear


Gear Type

Led Driver

Input Voltage

220-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
850mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Yes
Yes
20,4-41,6W
0,9
Yes
24-49V
IP20

No
Plastic
Cable
Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
2200lm
73,33lm/W
80
80°


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton
Barcode
HS Code

26cm
26cm
9,5cm
1,22kg
9
5291889040224
9405409900

Energy Label

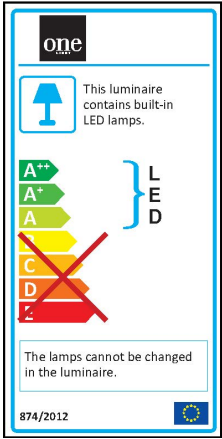

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes