


06 Downlights Fixed LED>Dark Light Pro Range Aluminium

10130ED/W/BS/W

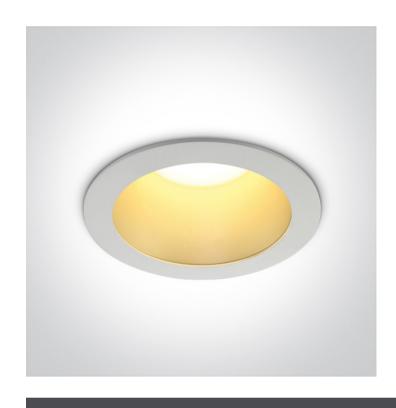

30W COB LED recessed downlight, for general lighting applications.

Complete with 750mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions





100mm

Physical Specification


Item Group	06 Downlights Fixed LED
Family	Dark Light Pro Range Aluminium
Order Code	10130ED/W/BS/W
Colour	White-Brass
Material	Aluminium
Shape	Circular
Height	100mm
Diameter	170mm
Cutout Hole Diameter	145mm
Recessed Ceiling	Yes
Depth Required	130mm
Indoor	Yes

Electrical Characteristics

Fitting + Driver input Voltage 220-240V 50 Hz Yes 60 Hz Safety Class Power(Watts) 1P Rating IP20 Light Source LED built in Dimmable F Mark Fitting Input Type Input Type Input Type Input Current Input Current Input Current T50mA
Input Voltage 50 Hz Yes 60 Hz Yes Safety Class Power(Watts) IP Rating Light Source Dimmable F Mark Fitting Input Type Constant Current Yes Yes Avea Yes Yes Yes Avea Yes Yes Avea Yes Yes Avea Avea Yes Avea Avea Yes Avea Avea Yes Avea Yes Avea Yes Avea Avea Avea Yes Avea Avea
Fitting Yes Yes Yes Yes Yes Yes Yes Ye
Fitting Yes Yes Yes I Power(Watts) IP Rating IP20 LED built in No F Mark Fitting Input Type Yes Yes Yes Yes Yes Yes Yes Y
Safety Class Power(Watts) IP Rating Light Source Dimmable F Mark Fitting Input Type Constant Current
Power(Watts) IP Rating Light Source Dimmable F Mark Fitting Input Type Source Constant Current
IP Rating Light Source LED built in No F Mark Fitting Input Type IP20 IP20 LED built in No Constant Current
Light Source Dimmable F Mark Fitting Input Type LED built in No Constant Current
Dimmable F Mark Fitting Input Type Constant Current
Fitting Input Type Constant Current
Fitting Input Type Constant Current
Input Type Constant Current
Input Type Constant Current
Input Current 750mA
Voltage 34,5V
Safety Class
Power(Watts) 29,3W
IP Rating IP20
Light Source LED built in
LED Type SMD 2835
LED Brand Sanan
LED Number 1
F Mark
Gear
Gear Type Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	19-31,5W
Power Factor	0,9
Constant Current	Yes
750mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	LIFUD
Ilumination Data	
Colour Temperature	3000K
Colour Temperature Lumen Output	3000K 2100lm
Lumen Output	2100lm
Lumen Output Light Efficiency	2100lm 70lm/W 80 60°
Lumen Output Light Efficiency CRI	2100lm 70lm/W 80
Lumen Output Light Efficiency CRI Beam Angle	2100lm 70lm/W 80 60°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	2100lm 70lm/VV 80 60°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	2100lm 70lm/VV 80 60°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	2100lm 70lm/VV 80 60°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	2100lm 70lm/VV 80 60°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	2100lm 70lm/W 80 60° Yes
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length	2100lm 70lm/W 80 60° Yes
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width	2100lm 70lm/W 80 60° Yes 17,5cm 12cm
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height	2100lm 70lm/W 80 60° Yes 17,5cm 12cm 18cm
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height Pcs/Carton	2100lm 70lm/W 80 60° Yes 17,5cm 12cm 18cm

Energy Label



Certification	& W	/arrantv

Warranty	2 Years
Weee Directive	Yes